



LINEA 1-FRL

# LINEA 1

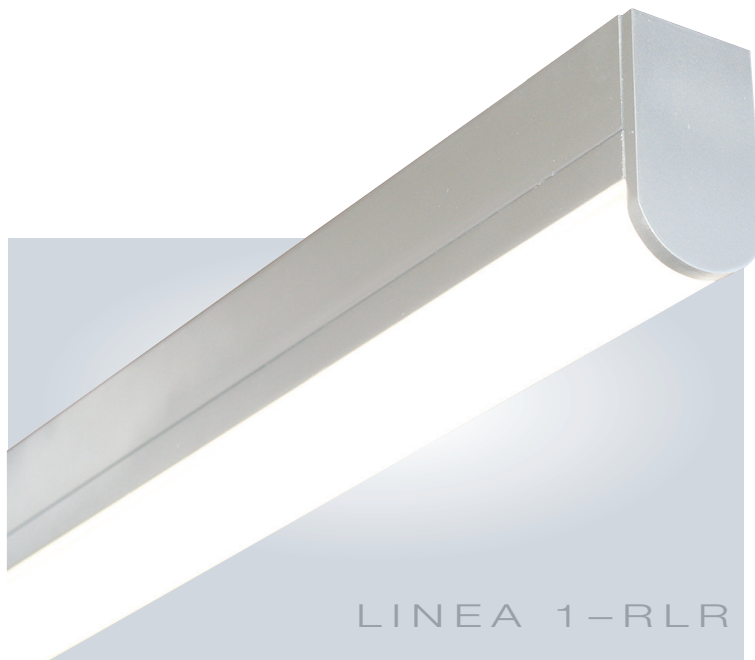

LINEA 1-RLR

1 3/8" WIDE  
SERIES

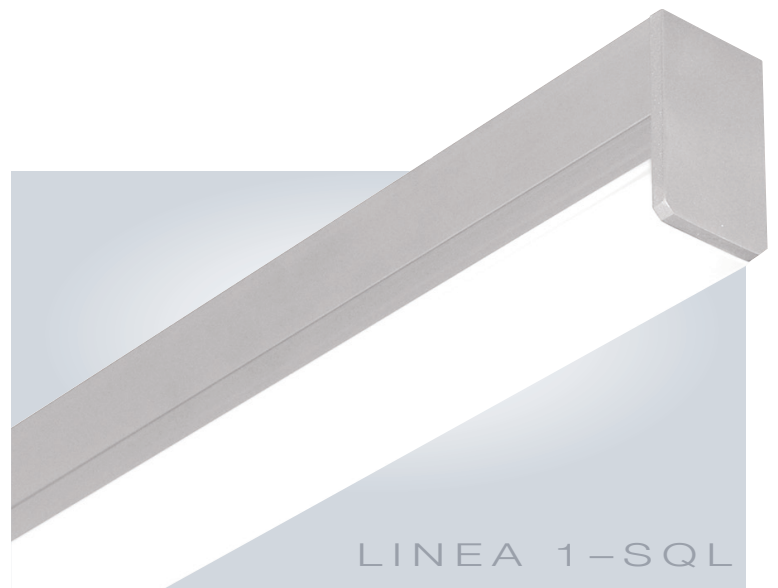

LINEA 1-SQL

**SPECIFICATIONS**

**LINEA 1 – FRL**

**LINEA 1 – RLR**

**LINEA 1 – SQL**

**HOUSING**

Extruded aluminum housing up to 12' long. Continuous runs available.

**FINISH**

Satin anodized or white paint finish standard. Custom powder coat finish optional.

**LENS**

Snap on, extruded white frosted DR acrylic, with wide distribution and no pixelization.

**LED DRIVER**

Integral, universal voltage;  
0-10V 1% or 10% standard  
DALI Optional

**OPTIONS**

Architectural Endcaps  
EM Packs

**MOUNTING**

Surface Mount  
Wall Mount  
Adjustable Mount  
Cable Suspended




**LED's**

60,000 hours. (L70),  
High uniformity, 85 CRI




*Please see website for complete specifications*

**CERTIFICATION**



ETL/CSA listed damp locations.




**STANDARD ENDCAPS**




**ARCHITECTURAL ENDCAPS**



**MOUNTING OPTIONS**




ADJUSTABLE MOUNT



SURFACE MOUNT



WALL MOUNT



PENDANT MOUNT