



RECTANGULO




LIGHT OPTIONS

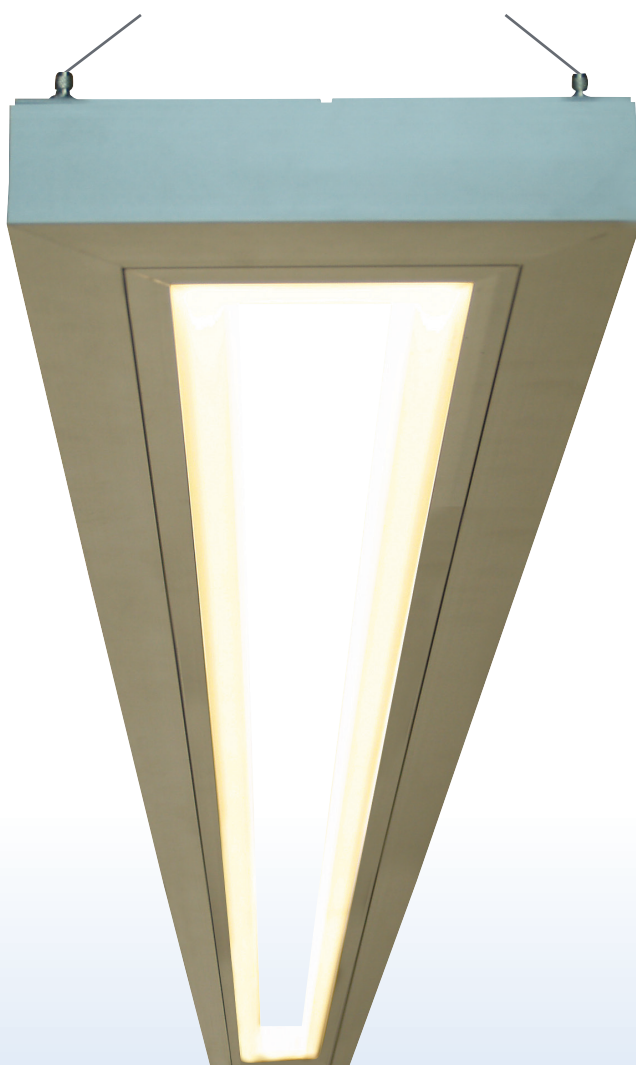

DOWN LIGHT



UP LIGHT



INSIDE LIGHT



OUTSIDE LIGHT

SPECIFICATIONS

DESCRIPTION

Architectural LED rectangle patterns available with down light, up light, inside light or outside light options.

LENS

Three styles; White frosted acrylic, smooth uniformity and no pixelization.

LED's

(LED boards) 50,000 hours. (L70), 85 CRI, by Nichia and Cree; 2700K, 3000K, 3500K and 4000K; Programmable output to greater than 1000L/FT

HOUSING

Extruded aluminum housing, 1 3/8" wide.
No visible hardware.

LED DRIVER

Integral or remote (*Included*), universal voltage; 0-10V dimming standard; custom programmable.

CERTIFICATION

ETL/CSA listed for damp locations.



2001431



MADE IN THE USA


FINISH

Satin anodized or white paint finish standard. Custom finish optional.


MOUNTING

Cable Suspended and Surface Mount


LENS OPTIONS

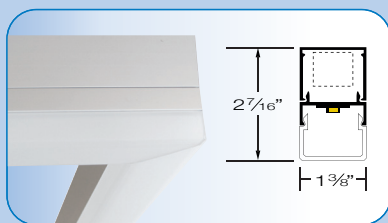

SQL – SQUARE LENS

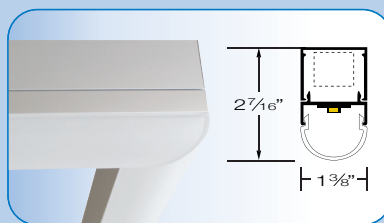

RLR – ROUND LENS

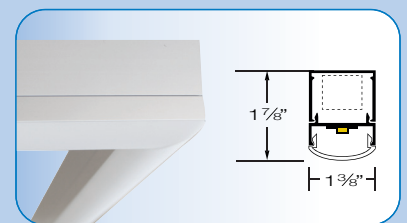

FRL – FLAT ROUND LENS