


LED MIRROR / VANITY LIGHTING WITH GUARDS

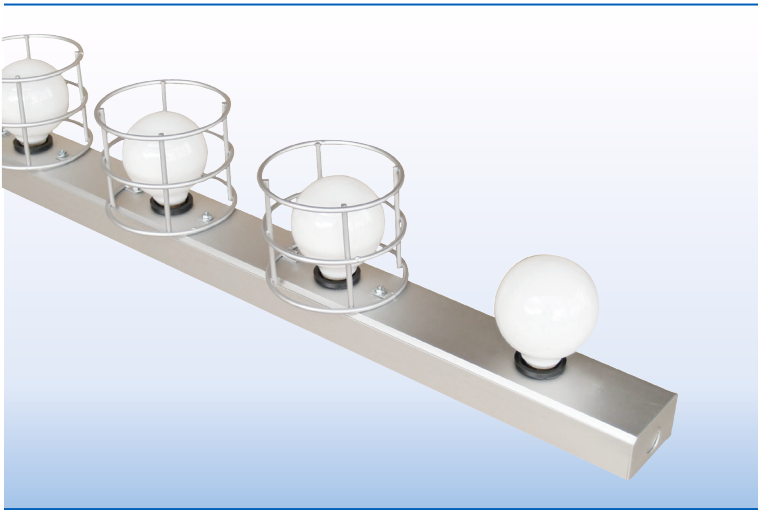


PROJECT:
TYPE:


SPECIFICATIONS

HOUSING	Two piece snap together top/bottom extruded aluminum housing up to 12' long.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
SOCKETS	MB - Medium base phenolic sockets. Candelabra base available; consult factory.
GUARDS	Round or Square; Required per NEC 520-72 for some applications.
LAMPS	LED lamps available. See page 2 for options.
CONFIGURATION	Straight, Custom Patterns - See page 2 for details.
CERTIFICATION	ETL listed for damp locations. 2001431 MADE IN THE USA

SERIES OPTIONS

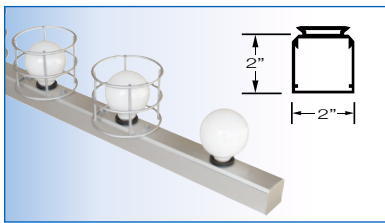

RG2-MB - MEDIUM BASE

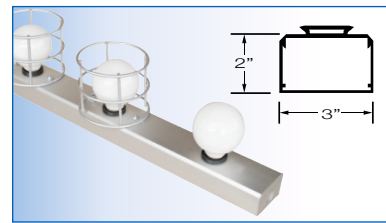

RG3-MB - MEDIUM BASE


PART NUMBER

SERIES	SPACING	CONFIGURATION	ACCESSORIES	LAMP	FINISH	DIMENSIONS
RG2-MB	6 6" O/C	ST STRAIGHT	RLG ROUND GUARD	SELECT FROM PAGE 2	S SATIN	SPECIFY
RG3-MB	9 9" O/C	PAT PATTERN	SLG SQUARE GUARD		W WHITE	
	12 12" O/C		SW SWITCH		C CUSTOM	
	OTHER SPECIFY		DR DUPLEX RECEPTACLE			
	NO GUARDS FOR 6" O/C		DR/USB RECEPTACLE WITH USB			
			GFI RECEPTACLE			

CONFIGURATION




ST - STRAIGHT




PAT - PATTERN (PROVIDE DWG.)

ACCESSORIES




RLG
ROUND LAMP GUARD



SLG
SQUARE LAMP GUARD



SW
SWITCH



DR or DR/USB
DUPLEX RECEPTACLE
WITH OR WITHOUT USB
(15A STANDARD)



GFI
RECEPTACLE
(15A STANDARD)

NOTES:

- Fixtures can be ordered without guards however NEC 520-72 requires protective guards on all performing arts dressing room mirror fixtures with lamps exposed.
- Follow NEC 520-73, if on board switches or receptacles are to be used.
- Guards not recommended for 6" O/C spacing.

LED FILAMENT STYLE LAMPS



A15
FROSTED
450L
4.5W
2700K
83 CRI



A19
FROSTED
450L
4.5W
2700K
83 CRI



G16.5
FROSTED
325L
3.5W
2700K
83 CRI



G25
FROSTED
350L
3.5W
2700K
83 CRI



* CONSULT FACTORY FOR SILVER TIP OR OTHER LAMP REQUIREMENTS/OPTIONS.

* LED LAMPS DIM DOWN TO 10% WITH A TRAILING EDGE (ELV) DIMMER.