



MOUNTING OPTIONS


SC – STRAIGHT CABLES STYLE

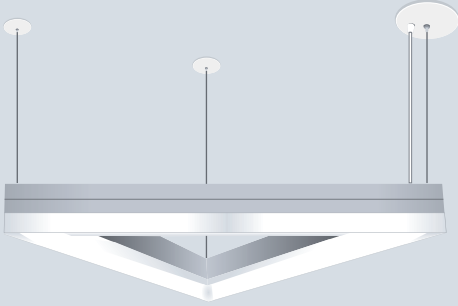


PC – PYRAMID CABLES STYLE

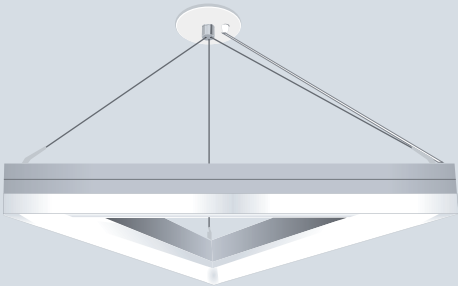

CC – CENTER CABLE STYLE

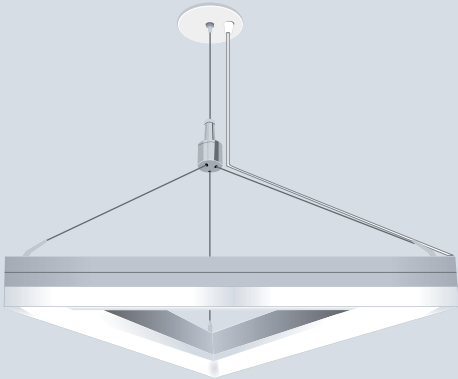

SM – SURFACE MOUNT

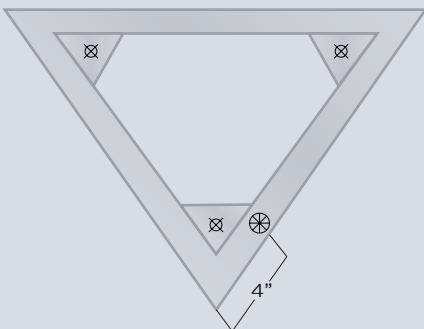

SPECIFICATIONS

DESCRIPTION

Architectural LED triangle patterns available with down light or up light.

HOUSING

Extruded aluminum housing, 1 3/8" or 2" wide.

FINISH

Powder coat satin or white finish standard. Custom finish optional.

LENS

Three styles; White frosted acrylic, for smooth uniformity and no pixelization.

LED DRIVER

Integral or remote (*Included*), universal voltage; 0-10V 1% dimming standard; custom programmable.

MOUNTING

Cable suspended and surface mount:

LED's

(LED boards) 50,000 hours. (L70), 85 CRI, 2700K, 3000K, 3500K and 4000K; Programmable output to greater than 1000L/FT

CERTIFICATION

ETL/CSA listed for damp locations.




2001431




MADE IN THE USA

LENS OPTIONS

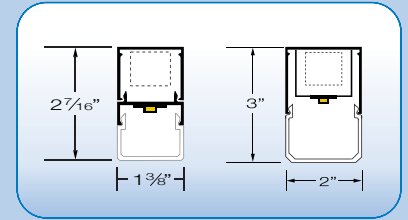


TR1 SQL
SQUARE LENS

TR2 SQL
SQUARE LENS

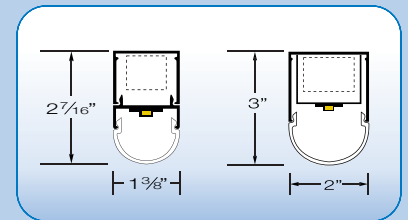

TR1 RLR
ROUND LENS

TR2 RLR
ROUND LENS

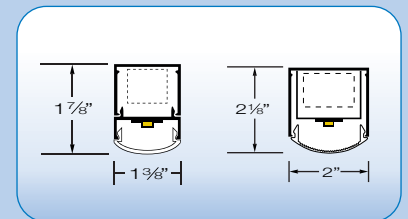

TR1 FRL
ROUND FLAT LENS

TR2 FRL
ROUND FLAT LENS

PRIMUS
Shining Brighter, Together!

TRIANGULO
LED SERIES

WWW.PRIMUSLIGHTING.COM