

COVE 1 (CV1) SERIES

(FLX) FIELD CURVEABLE

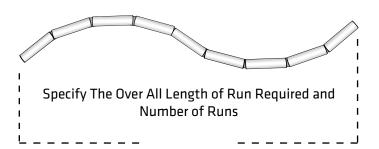



(ST) STRAIGHT

Specify The Over All Length of Run Required and Number of Runs

		_	-	-	_	-	_
SERIES	LED TYPE	LUMENS	REMOTE DRIVER	CONFIGURATION	MOUNTING	FINISH	LENGTH
	STANDARD LED	FOR STANDARD LED	FOR STANDARD LED				
CV1	27K 2700k	L LOW	UNV0% 0-10V0%	FLX FIELD	SM STANDARD	W WHITE	SPECIFY
CV1 A	30K 3000k	M MEDIUM	UNV1% 0-10V1%	CURVEABLE	MOUNT	S SATIN	
	35K 3500k	H HIGH	UNV10% 0-10V10%			B BLACK	
	40K 4000k	CL CUSTOM	UNVCD% 0-10VCD	ST STRAIGHT	TB TAB MOUNT	c custom	
		LUMENS	TRIAC 2 WIRE		(Optional)		
			DALI DALI				
			LTRN LUTRON				
	SPECIAL LED	FOR SPECIAL LED	FOR SPECIAL LED				
	R RED	Specify	Refer to driver				
	G GREEN	required	options in				
	B BLUE	lumens	compatibility chart				
	RGBW RGBW	or	or				
	DTW DIM TO WARM	consult factory	consult factory				
	TW TUNABLE WHITE						



25072 Anza Dr					
Valencia, CA 91355					
626.442.4600					
primuslighting.com					

Job Name:		Type:	
Part No:			
SO / Quote No:	Dwg Date:	Revised Date:	
Approved By:		Date:	