


DECOBAR - (DB) SERIES

WET / DRY / CABLE SUSPENDED / SURFACE MOUNT FIXTURES



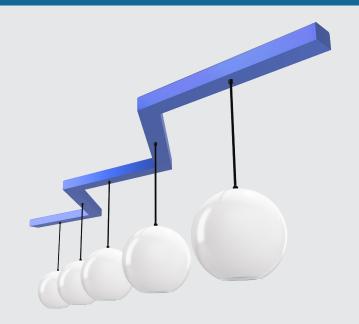





PROJECT

TYPE

NOTES

FEATURES

CONSTRUCTION

High Quality Extruded Aluminum which is lighter and more weather resistant than steel – produced in 1", 2", and 3" wide housing channels up to 12' in a single section. Longer runs available with butt seams.

FINISH

Anodized Satin Aluminum, White and Black are standard finishes with the option for any custom powder coat finish giving superior finishes that are resistant to chipping, fading, and scratching.

DROP STYLES

Wide Assortment of custom shapes, sizes, finishes, and designs to fit and compliment any ambiance.

LIMITLESS CUSTOMIZATION

Where imagination and innovation converge. Whether its straight runs, curves, patterns, shapes, drop variations, or colors; Our simple platform for Decobar allows for easy customization.

EASY INSTALLATION

Either surface or suspended mount, Decobar is designed to have one-single feed point for a quick and smooth installation.

WET-RATED

Our 120V system has been tested and approved for indoor/outdoor wet locations. Conforms to IP65

| SERIES | CHANNEL SIZE & FINISH | CHANEL LENGTH | CHANNEL CONFIGURATION | MOUNTING | DROP STYLE | DROP SPACING | CORD | LAMP |
|---------------|--------------------------|--------------------------|--------------------------|---------------------|-----------------------|--|--|-----------------------|
| DB/D DRY DAMP | <u>SELECT</u> | 1' - 12' OTHER | ST STRAIGHT | SM SURFACE MOUNT | <u>SELECT</u> FROM | 12 12" 0/C 18 18" 0/C | 36B 36" BLACK 36W 36" WHITE | <u>SELECT</u> FROM |
| DD/W WEI | PAGE 3 | SPECIFY | MC MITER CUT | CABLE SUSPENDED | <u>PAGE 7, 8</u> | 24 24" 0/C | 36" STANDARD FIELD | PAGE 9 |
| | | <u>SEE PAGE 3</u> | CD CUSTOM | SK36 36" KIT | | 36 36" O/C OTHER | ADJUSTABLE | |
| | | | | SK48 48" KIT | | SPECIFY | SPECIFY | |

(661) 495 - 5700 | www.primuslighting.com






(DB) - DECOBAR FIXTURE DRAWING & OPTIONS



| PROJECT | | NOTES | | | | | |
|--------------|-------|-------|--|--|--|--|--|
| | | | | | | | |
| ТҮРЕ | | | | | | | |
| | | | | | | | |
| APPROVED BY: | DATE: | | | | | | |
| | | | | | | | |

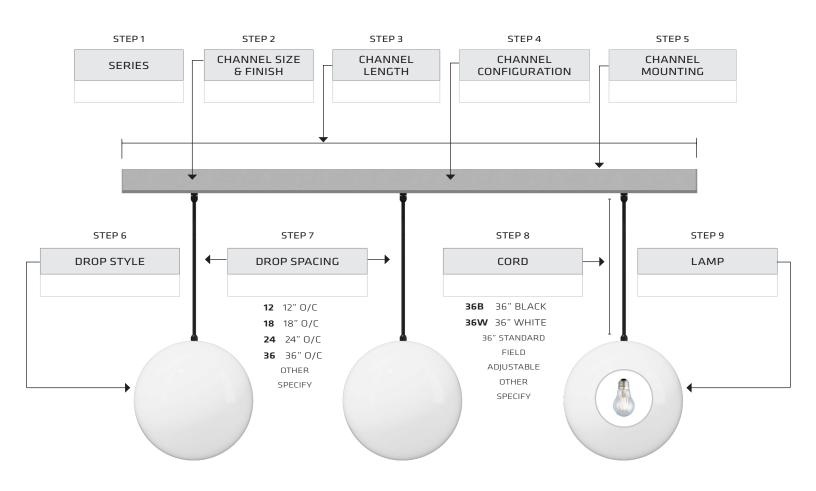


| STEP 1 | STEP 2 | STEP 3 | STEP 4 | STEP 5 | STEP 6 | STEP 7 | STEP 8 | STEP 9 |
|---------------------------|---------------------------|--|--|--|------------------------------------|--|---|--------|
| | | | | | - | | - | _ |
| SERIES | CHANNEL SIZE & FINISH | CHANEL LENGTH | CHANNEL CONFIGURATION | MOUNTING | DROP STYLE | DROP SPACING | CORD | LAMP |
| DB/D DRY DAMP DB/W WET | SELECT. FROM PAGE 3 | 1' - 12' <u>OTHER</u> <u>SPECIFY</u> <u>SEE PAGE 3</u> | ST STRAIGHTCV CURVEDMC MITER CUTCD CUSTOM | SM SURFACE MOUNT CABLE SUSPENDED SK36 36" KIT SK48 48" KIT | <u>SELECT</u> FROM PAGE 7, 8 | 12 12" 0/C 18 18" 0/C 24 24" 0/C 36 36" 0/C OTHER SPECIFY | 36B 36" BLACK 36W 36" WHITE 36" STANDARD FIELD ADJUSTABLE OTHER SPECIFY | |







CHANNEL SIZE OPTIONS

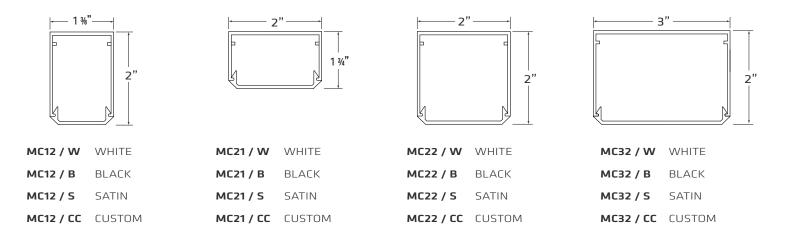

All channels are of a high quality extruded aluminum, up to 12' long. See below for finish options.

CHANNEL FINISH OPTIONS







White, Satin and Black are standard finishes.

Finish part number is already included in the above channel size part number.

The actual color of the product may vary from what is seen on electronic devices.

We cannot guarantee that the color you see on your screen accurately reflects the true color of the product.

CHANNEL LENGTH OPTIONS

| NOMINAL LENGTH | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | 10' | 11' | 12' | OTHER |
|----------------|----|----|----|----|----|----|----|----|----|-----|-----|-----|---------|
| ACTUAL LENGTH | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | 10' | 11' | 12' | SPECIFY |

The above lengths are standar lengths for straight configuration only.

Channel lengths can be ordered in shorter or longer lengths than the ones specified above.

12' Long is the maximum length in one single & continuous channel, longer lengths are available by connecting multiple channels. Custom patterns, custom curved and custom runs configuration require a drawing or template.









(ST) - STRAIGHT

For lengths options and details for straigth configurations (See page 3)

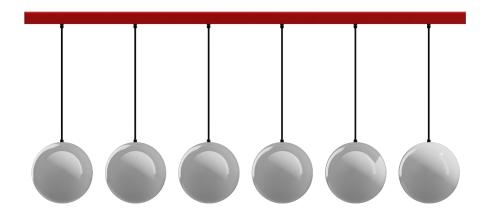

(CV) - CUSTOM CURVED

This configuration allows the design of full or partial circles & custom curved patterns. Custom curved configuration designs require a drawing or template including radius information.

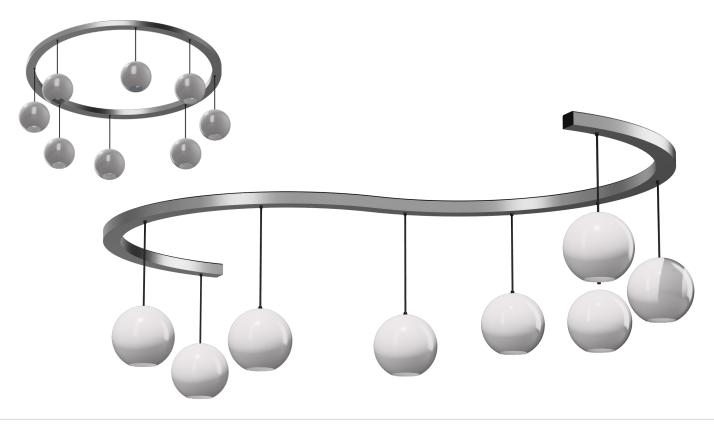







(MC) - MITER CUT PATTERN CONFIGURATION

Miter cut pattern configuration designs require a drawing or template.

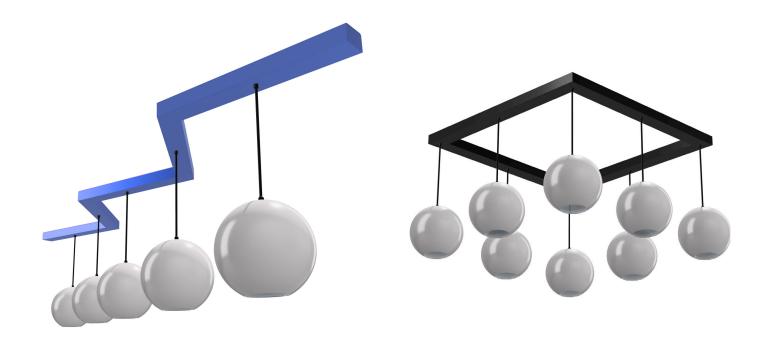

(CD) - CUSTOM DESIGNS

Custom designs require drawings or templates. The designs displayed below are only examples and may not be suitable for some applications that can result in damage to the product and/or create hazardous situations for outdoor and wet location applications. Consult the factory if you have any questions or need help with your idea or custom designs.

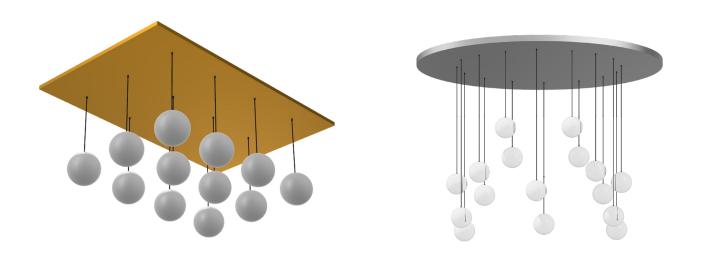




(DB) - DECOBAR MOUNTING OPTIONS & DETAILS



SURFACE MOUNT (Dry / Damp / Wet)

Surface mounted channels are shipped undrilled for maximum field versatility. Pre-drilled mounting holes & power service hole available on request, consult factory with details.

- Black or gray cord grips are preinstalled in factory.
- Drop fixtures require to be installed in the field



CABLE SUSPENDED (Dry / Damp)

SK36 36" Suspension Kit **SK48 48"** Suspension Kit Other cable lengths available.

EACH SUSPENTION KIT INCLUDES:

(2) Top Fittings for 1/4-20 Rod (1/4-20 Rod by Others)

(2) Adjustable Bottom Fittings (Pre attached to mounting channel)(2) Aircraft Cables

- (1) 5" Canopy With Mounting Hardware
- (1) 2" Canopy
- (1) Prewired to mounting channel 18/3 Black or White Power Cord (1) Cord grip

• Canopies to match channel finish

- Fixture lengths over 8' require center cable support
- Custom pendant spacing available, consult factory
- Black or gray cord grips are preinstalled in factory.
- Drop fixtures require to be installed in the field


CABLE SUSPENDED (Wet)


SK36 36" Suspension Kit **SK48 48"** Suspension Kit Other cable lengths available.

EACH SUSPENTION KIT INCLUDES:

(2) Top Fittings for 1/4-20 Rod (1/4-20 Rod by Others)
(2) Adjustable Bottom Fittings (side exit)
(pre attached to mounting channel)
(2) Aircraft Cables
(1) Prewired 18/3 Black or White Power Cord
(1) Cord Grip

- W/P J Box not included (by others)
- Fixture lengths over 8' require center cable support
- Black or gray cord grips are preinstalled in factory.
- Drop fixtures require to be installed in the field

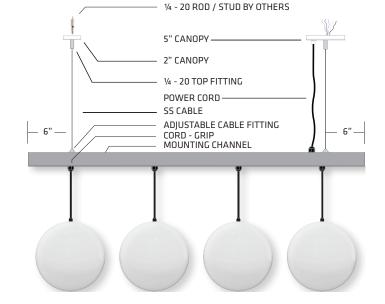

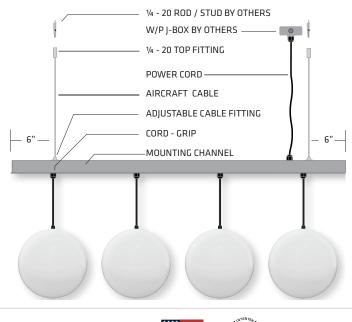

(661) 495 - 5700 | www.primuslighting.com






(DB) - DECOBAR DROPS OPTIONS



ACRYLIC DROPS

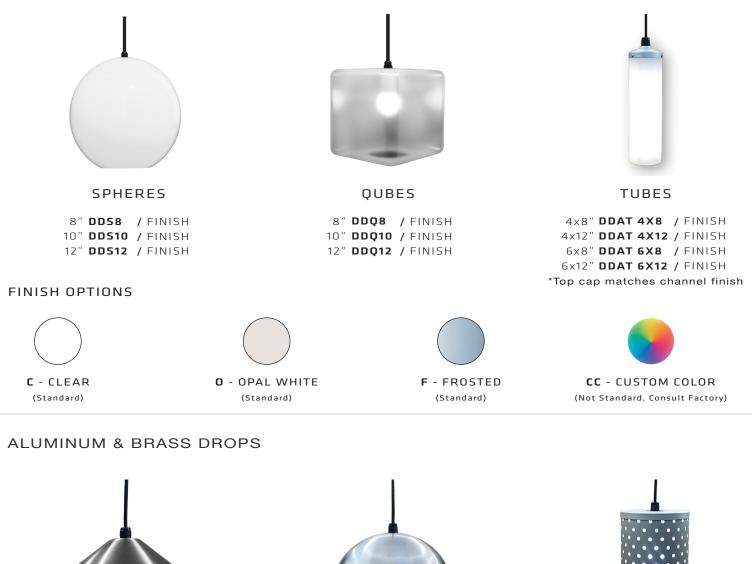



CONES

8" DDC8 / FINISH 10" DDC10 / FINISH 12" DDC12 / FINISH

FINISH OPTIONS



AB - AGED BRASS VB - VERDE BRASS (Acid Etched, Standard)

(Acid Etched, Standard) (Powder Coat, Standard) (Powder Coat, Standard) (Powder Coat, Standard)

W - WHITE



/ FINISH

DOMES

10" DDD10 / FINISH

12" DDD12 / FINISH

8" **DDD8**

B - BLACK



CC - CUSTOM COLOR

(Not Standard, Consult Factory)

PERFORATED TUBES

4x8" DDPT4X8 / FINISH

4x12" DDPT4X12 / FINISH

6x8" DDPT6X8 / FINISH 6x12" DDPT6X12 / FINISH

(661) 495 - 5700 | www.primuslighting.com


Due to continued product improvements and enhancements, Primus Lighting Manufacturing Company reserves the right

to alter specifications, dimensions, data, and or materials without notice. Please visit our website to view the most current information.





STEEL, ALUMINUM & BRASS CAGES & GUARDS DROPS

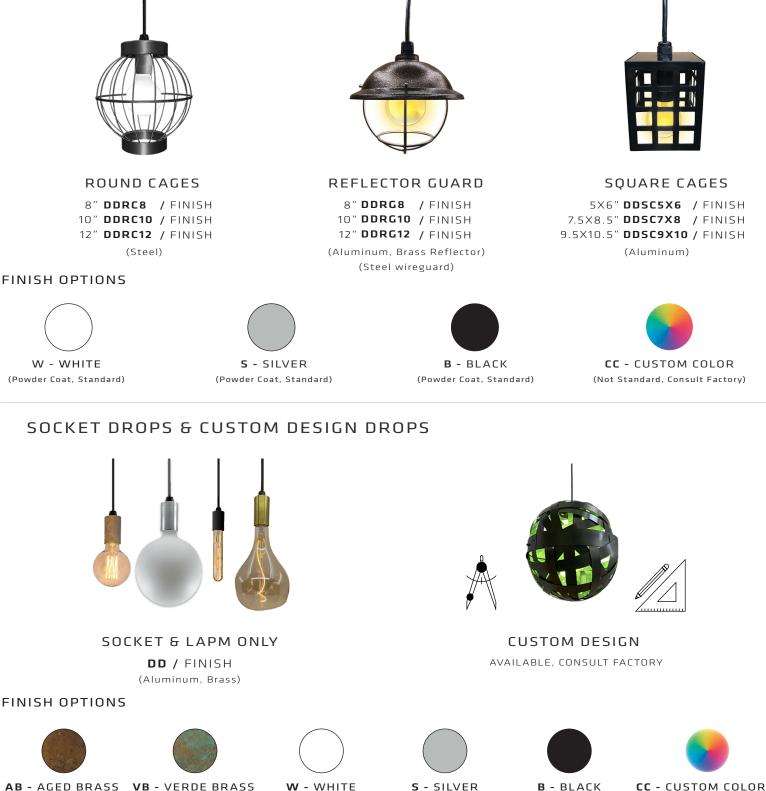

(Acid Etched, Standard)

(Acid Etched, Standard) (Powder Coat, Standard) (Powder Coat, Standard) (Powder Coat, Standard)

(Not Standard, Consult Factory)

(661) 495 - 5700 | www.primuslighting.com







TRADITIONAL LAMPS, Wet Rated, Outdoor / Indoor (Dim to Off)



 G16.5, 3.5W, 325L

 G16/C/24
 24K, CLEAR

 G16/W/24
 24K, WHITE

 G16/C/27
 27K, CLEAR

 G16/W/27
 27K, WHITE



 S14, 1.5W, 15OL

 S14/C/24
 24K, CLEAR

 S14/W/24
 24K, WHITE

 S14/C/27
 27K, CLEAR

 S14/W/27
 27K, WHITE



 G25, 3.5W, 35OL

 G25/C/24
 24K, CLEAR

 G25/W/24
 24K, WHITE

 G25/C/27
 27K, CLEAR

 G25/W/27
 27K, WHITE



 G40, 4.5 W, 500L

 G40/C/24
 24K, CLEAR

 G40/W/24
 24K, WHITE

 G40/C/27
 27K, CLEAR

 G40/W/27
 27K, WHITE



A15, 3.5W, 25OL, 12V A15/12/27 27K, CLEAR Low Voltage transformer required for this lamp (Non Dimming)

The above lamps dim to off using ELV/TE dimmer

VINTAGE LAMPS, Wet Rated, Outdoor / Indoor (Dim to off)



VC19, 3.5W, 22K, 350L



ST19, 3.5W, 22K, 350L

VC19/AG/22

ST19/AG/22 AMBER GLASS

AMBER GLASS AMBER GL The above lamps dim to off using ELV/TE dimmer



G25, 3.5W, 22K, 350L G25/AG/22 AMBER GLASS



G40, 3.5W, 22K, 350L G40/AG/22 AMBER GLASS



T10, 3.5W, 22K, 350L T10/AG/22 AMBER GLASS



Consult factory for a different lamp shape, lumens, color or any other special features

(661) 495 - 5700 | www.primuslighting.com