



DIRECT / INDIRECT LIGHT LINEAR LED FIXTURE

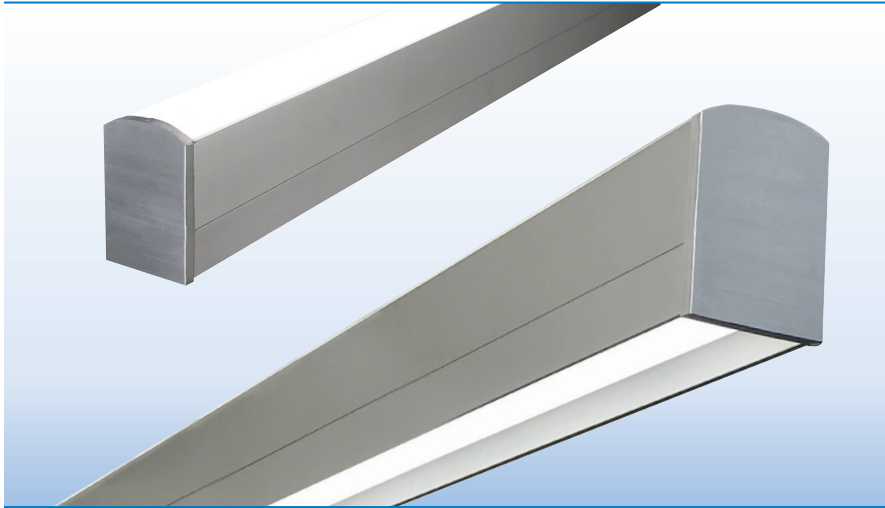

PROJECT:


TYPE:

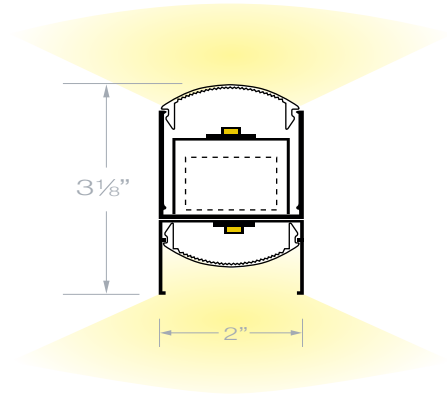


SPECIFICATIONS

DESCRIPTION	Architectural direct/indirect linear LED luminaire.
HOUSING	Extruded aluminum housing, 2" wide and up to 12' long; no exposed hardware.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
LENS	White frosted acrylic, smooth uniformity and no pixelization. TOP LENS: Flat Round Lens. DOWN LENS: Four Styles (See Below & Page 2 for Dimensions)
LED DRIVER	Integral (<i>Included</i>), Universal Voltage; 1% and 10% 0-10V Dimming Standard; Custom Programmable.
MOUNTING	Cable Suspended & Wall Mount: See Page 3 for details.
LED's	(LED boards) 50,000 hours. (L70), 80 CRI, 2700K, 3000K, 3500K and 4000K.
CERTIFICATION	ETL/CSA listed for damp locations.  2001431  MADE IN THE USA


LENS OPTIONS




DL - RGL – REGRESSED



DL - FRL – FLAT ROUND LENS



DL - RLR – ROUND LENS

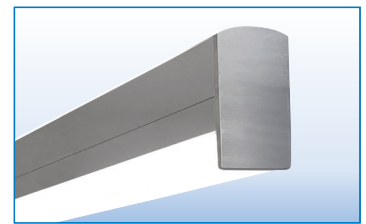


DL - SQL – SQUARE LENS

PART NUMBER

SERIES	LUMENS	COLOR	VOLTS	ENDCAP STYLE	MOUNTING	FINISH	LENGTH
DL - RGL	L/L LOW	27K 2700K	120V/277V	STANDARD ENDCAP	SURFACE MOUNT	S SATIN	2' 8'
DL - FRL	M/M MEDIUM	3K 3000K	UNV 1 1% DIM	SEB BLANK ENDS	WM WALL MOUNT	W WHITE	4' 10'
DL - RLR	H/H HIGH	35K 3500K	UNV 10 10% DIM	ARCHITECTURAL ENDCAP	CABLE SUSPENDED	C CUSTOM	6' 12'
DL - SQL	CP CUSTOM PROGRAMMED (Specify Lumens/FT or Watts/FT)	4K 4000K		AEB BLANK ENDS	SK36 36" CABLE KIT SK48 48" CABLE KIT SK72 72" CABLE KIT		SQUARES & RECTANGLES CONSULT FACTORY

ENDVIEWS (PROFILE DIMENSIONS)

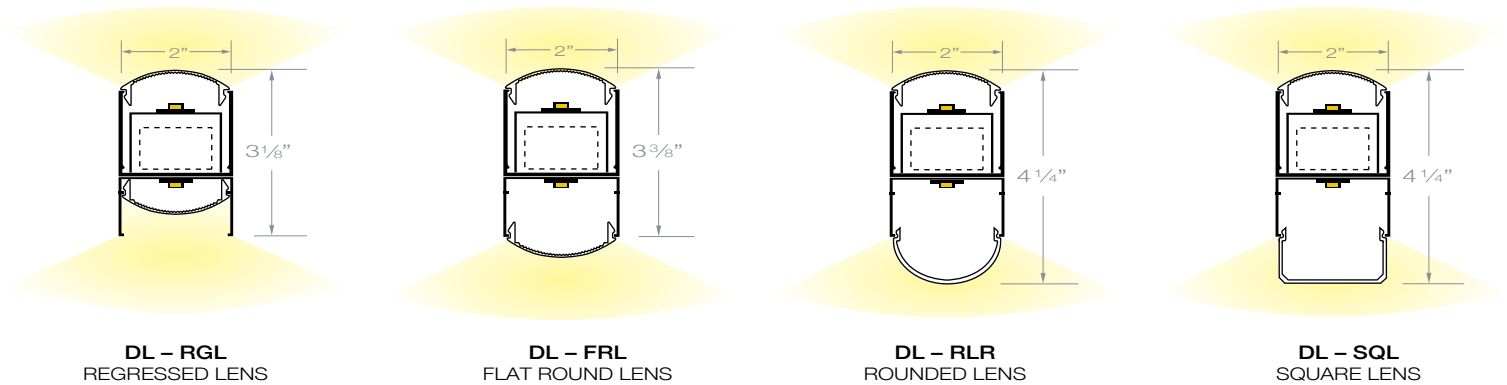

*Consult factory for square and rectangle patterns.

LUMENS & LED COLOR OPTIONS


		LUMENS PER FOOT – WATTS PER FOOT – LUMENS PER WATT								
LED COLOR (85 CRI)		LOW			MEDIUM			HIGH		
WHITE 2700K	UP	500 L/FT	3.5 W/FT	136 L/W	870 L/FT	6.5 W/FT	130 L/W	1160 L/FT	9.0 W/FT	127 L/W
	DOWN	500 L/FT	3.5 W/FT	136 L/W	870 L/FT	6.5 W/FT	130 L/W	1160 L/FT	9.0 W/FT	127 L/W
	TOTAL	1000 L/FT	7.0 W/FT		1740 L/FT	13.0 W/FT		2300 L/FT	18 W/FT	
WHITE 3000K	UP	530 L/FT	3.5 W/FT	144 L/W	915 L/FT	6.5 W/FT	137 L/W	1220 L/FT	9.0 W/FT	133 L/W
	DOWN	530 L/FT	3.5 W/FT	144 L/W	915 L/FT	6.5 W/FT	137 L/W	1220 L/FT	9.0 W/FT	133 L/W
	TOTAL	1060 L/FT	7.0 W/FT		1830 L/FT	13.0 W/FT		2440 L/FT	18 W/FT	
WHITE 3500K	UP	535 L/FT	3.5 W/FT	144 L/W	920 L/FT	6.5 W/FT	137 L/W	1225 L/FT	9.0 W/FT	133 L/W
	DOWN	535 L/FT	3.5 W/FT	144 L/W	920 L/FT	6.5 W/FT	137 L/W	1225 L/FT	9.0 W/FT	133 L/W
	TOTAL	1070 L/FT	7.0 W/FT		1840 L/FT	13.0 W/FT		2450 L/FT	18 W/FT	
WHITE 4000K	UP	560 L/FT	3.5 W/FT	151 L/W	970 L/FT	6.5 W/FT	145 L/W	1290 L/FT	9.0 W/FT	140 L/W
	DOWN	560 L/FT	3.5 W/FT	151 L/W	970 L/FT	6.5 W/FT	145 L/W	1290 L/FT	9.0 W/FT	140 L/W
	TOTAL	1120 L/FT	7.0 W/FT		1940 L/FT	13.0 W/FT		2580 L/FT	18 W/FT	

Values include .85 driver efficiency factor. Higher lumen packages available.


Optional: Can specify different lumens independently for both top and bottom of fixture.

Example: L/H = "L" for low top lumens and "H" for bottom high lumens. This option requires additional drivers. Please consult factory for details and additional cost.

ENDCAP STYLES




STANDARD ENDCAP
K/O OPTIONS
SEB BLANK ENDS




ARCHITECTURAL ENDCAP
AEB BLANK ENDS
3/16" PLATE ENDCAP

WALL MOUNT

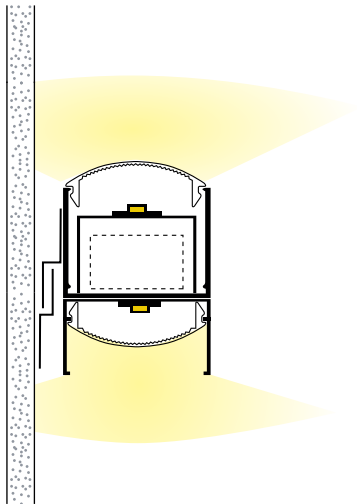

Mounting Brackets Included:
For more information, see installation instructions at primuslighting.com

CABLE SUSPENDED

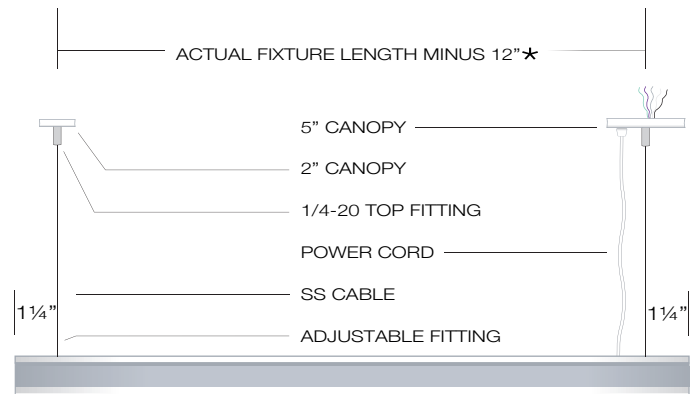


SK36 36" Suspension Kit
SK48 48" Suspension Kit
SK72 72" Suspension Kit
Other cable lengths available.

Suspension Kit includes:
(2) Top Fittings for 1/4-20 Rod
(2) Adjustable Bottom Fittings
(2) Aircraft Cables
(1) Prewired 18/5 White SVT Cord
(1) 5" White Canopy with Mounting Hardware
(1) 2" White Canopy


FIXTURE LENGTHS

NOMINAL LENGTH	2'	4'	6'	8'	10'	12'
ACTUAL LENGTH	25"	49"	73"	97"	121"	145"

CANDELA DISTRIBUTION CURVES




DL – RGL - REGRESSED LENS

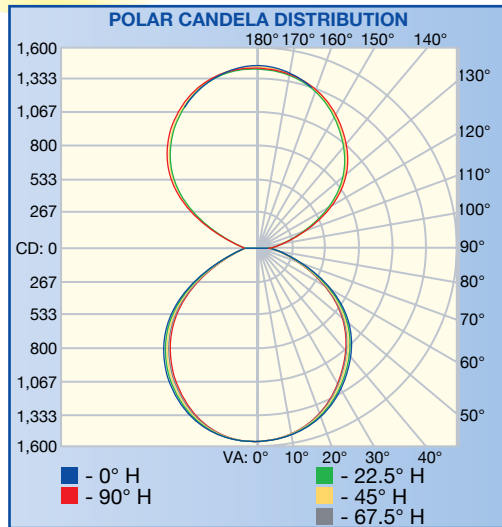


POLAR GRAPH

REPORT NO.: 103858894LAX-001

DL- RGL- H/H- 35K- 4' (DOBLE-LED REGRESSED LENS)




DL – FRL - FLAT ROUND LENS

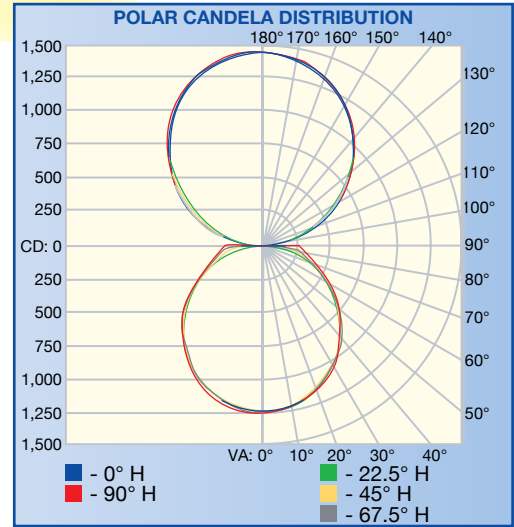


POLAR GRAPH

REPORT NO. 103858894LAX-002

DL- FRL- H/H- 35K- 4' (DOBLE-LED FRL LENS)




DL – RLR - ROUND LENS

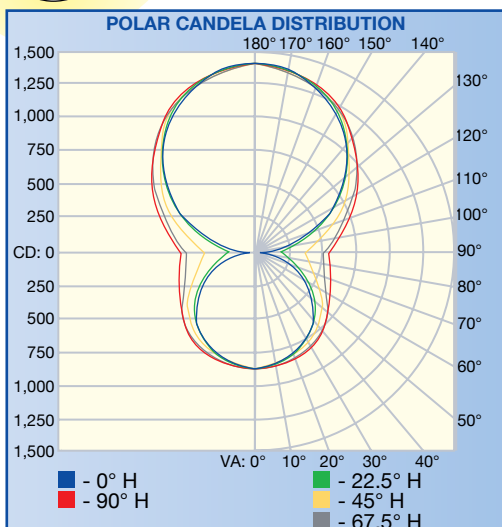


POLAR GRAPH

REPORT NO. 103858894LAX-003

DL- RLR- H/H- 35K- 4' (DOBLE-LED RLR LENS)



DL – SQL - SQUARE LENS

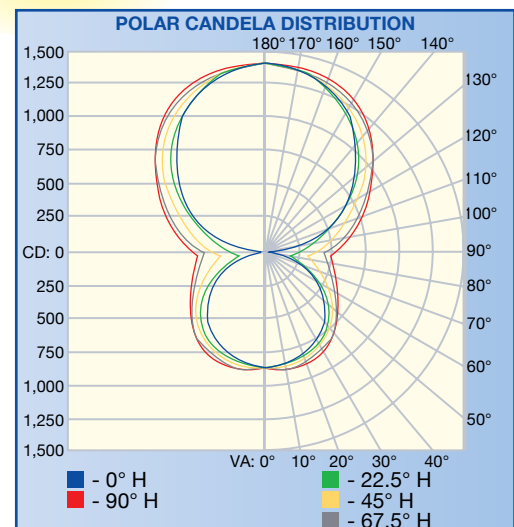

POLAR GRAPH

REPORT NO. 103858894LAX-004

DL- SQL- H/H- 35K- 4' (DOBLE-LED SQL LENS)

* IES FILES AVAILABLE; CONSULT FACTORY

SPECIFICATIONS ARE SUBJECT TO CHANGE
DUE TO CONTINUOUS ADVANCES IN TECHNOLOGY
© PRIMUS LIGHTING, INC. ALL RIGHTS RESERVED