



D O U B L E

DIRECT / INDIRECT
LINEAR LED LUMINAIRE

HOUSING

Extruded aluminum housing, 2" wide and up to 12' long; no exposed hardware.

FINISH

Satin anodized or white paint finish standard. Custom finish optional.

MOUNTING

Cable Suspended & Wall Mount: See Page 3 for details.

LED's

(LED boards) 50,000 hours. (L70), 85 CRI, by Nichia and Cree; 2700K, 3000K, 3500K and 4000K.

CERTIFICATION

ETL/CSA listed for damp locations.



LENS

White frosted acrylic, smooth uniformity and no pixelization.
TOP LENS: Flat Round Lens.
DOWN LENS: Four Styles


LED DRIVER

Integral (Included), Universal Voltage; 1% and 10% 0-10V Dimming Standard; Custom Programmable.


DOBLE



DL - RGL - REGRESSED

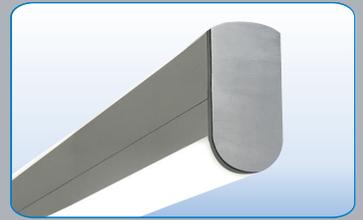


DL - RLR - ROUND LENS




DL - FRL - FLAT ROUND LENS




DL - SQL - SQUARE LENS




DL - RGL
REGRESSED LENS



DL - FRL
FLAT ROUND LENS



DL - RLR
ROUNDED LENS



DL - SQL
SQUARE LENS