


FOCUS 7 (FC7) SERIES

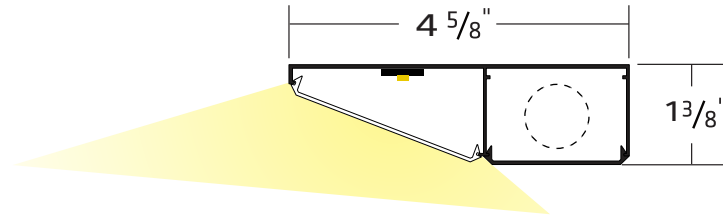

FC7
FOCUS 7

MODELS	LED TYPE	LUMENS	DRIVER	CONFIGURATION	MOUNTING	OPTIONS	POWER FEED	FINISH	LENGTH
FC7 FOCUS 7	27K 2700k	L LOW	UNV0% 0-10V 0%	SL STANDARD LENGTHS	SM STANDARD MOUNT	SW120S SMALL SWITCH 120V	EF ENDCAP FEED	S SATIN (Standard)	<u>STANDARD</u> 1'
	3K 3000k	M MEDIUM	UNV1% 0-10V 1%	CL CUSTOM LENGTHS	WB WALL BRACKET	SW277 SMALL SWITCH 277V	FDF FIELD DRILLED FEED	W WHITE (Standard)	2'
	35K 3500k	H HIGH	UNV10% 0-10V 10%	LS L SHAPE	WB/JBP WALL BRACKET + J-BOX PLATE	SWH/L SMALL SWITCH HI/LO	FPDF FACTORY PRE-DRILLED FEED	B BLACK (Premium)	3'
	4K 4000k	CL CUSTOM LUMENS	UNVCD% 0-10V CD	US U SHAPE		SWB120 PUSH BUTTON SWITCH			4'
		CW CUSTOM WATTS	TRIAC 2 WIRE	CD CUSTOM DESIGN		SW120L LARGE SWITCH 120V			5'
						SWD120 SWITCH/DIMMING 120V	PCL POWER CORD LEFT SIDE	C CUSTOM (Premium) (Specify RAL#)	6'
						MSP BI-LEVEL SENSOR	PCR POWER CORD RIGHT SIDE	A ANTIMICROBIAL (Premium)	7'
						DRW RECEPTACLE WHITE			8'
									9'
									10'
									11'
									12'
									<u>CUSTOM LENGTHS</u> Specify

FOCUS 7 (FC7) LED COLORS - LUMENS - LED DRIVERS

LED COLORS AND LUMENS

COLOR		DESCRIPTION										
		CRI	(L) LOW LUMENS			(M) MEDIUM LUMENS			(H) HIGH LUMENS			
☐	27K	2700K	CRI90	433 L/FT	3.5 W/FT	120 L/W	760 L/FT	6.5 W/FT	117 L/W	1026 L/FT	9.0 W/FT	114 L/W
☐	3K	3000K	CRI90	448 L/FT	3.5 W/FT	124 L/W	787 L/FT	6.5 W/FT	121 L/W	1062 L/FT	9.0 W/FT	118 L/W
☐	35K	3500K	CRI90	463 L/FT	3.5 W/FT	129 L/W	814 L/FT	6.5 W/FT	125 L/W	1098 L/FT	9.0 W/FT	122 L/W
☐	4K	4000K	CRI90	478 L/FT	3.5 W/FT	133 L/W	840 L/FT	6.5 W/FT	129 L/W	1134 L/FT	9.0 W/FT	126 L/W

(CL) Custom Lumens / ft, or (CW) custom watts / ft available. Higher Kelvin also available, consult factory.
Specify or consult factory for any other type of LED requirements not shown above such as led type, LED color, lumens, etc.

LED DRIVERS (Integral)

DRIVER		DESCRIPTION			
☐	UNV0%	0 - 10V Dimming Driver	0 % Dimming (Dim to Off)	120/277V	(347V Available)
☐	UNV1%	0 - 10V Dimming Driver	1% Dimming	120/277V	(347V Available)
☐	UNV10%	0 - 10V Dimming Driver	10% Dimming	120/277V	(347V Available)
☐	UNV(CD)%	0 - 10V Dimming Driver	Custom Dimming (Specify %)	120/277V	(347V Available)
☐	TRIAC	2 Wire Dimming Driver	2 Wire Phase Triac Dimming	120/277V	

Specify or consult factory for any other type of LED DRIVER requirements not shown above.

FOCUS 7 (FC7) CONFIGURATION - STANDARD LENGTHS


												
NOMINAL LENGTH	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
ACTUAL LENGTH	14"	25"	34"	49"	56"	73"	89"	97"	111"	121"	133"	145"

Specify fixture quantity and standard nominal length required.

FOCUS 7 (FC7) CONFIGURATION - CUSTOM LENGTHS

(CL) CUSTOM LENGTHS



Custom lengths are made with multiple fixtures connected end to end with our joiners.
The number of fixtures per run will be determined by Primus Lighting.

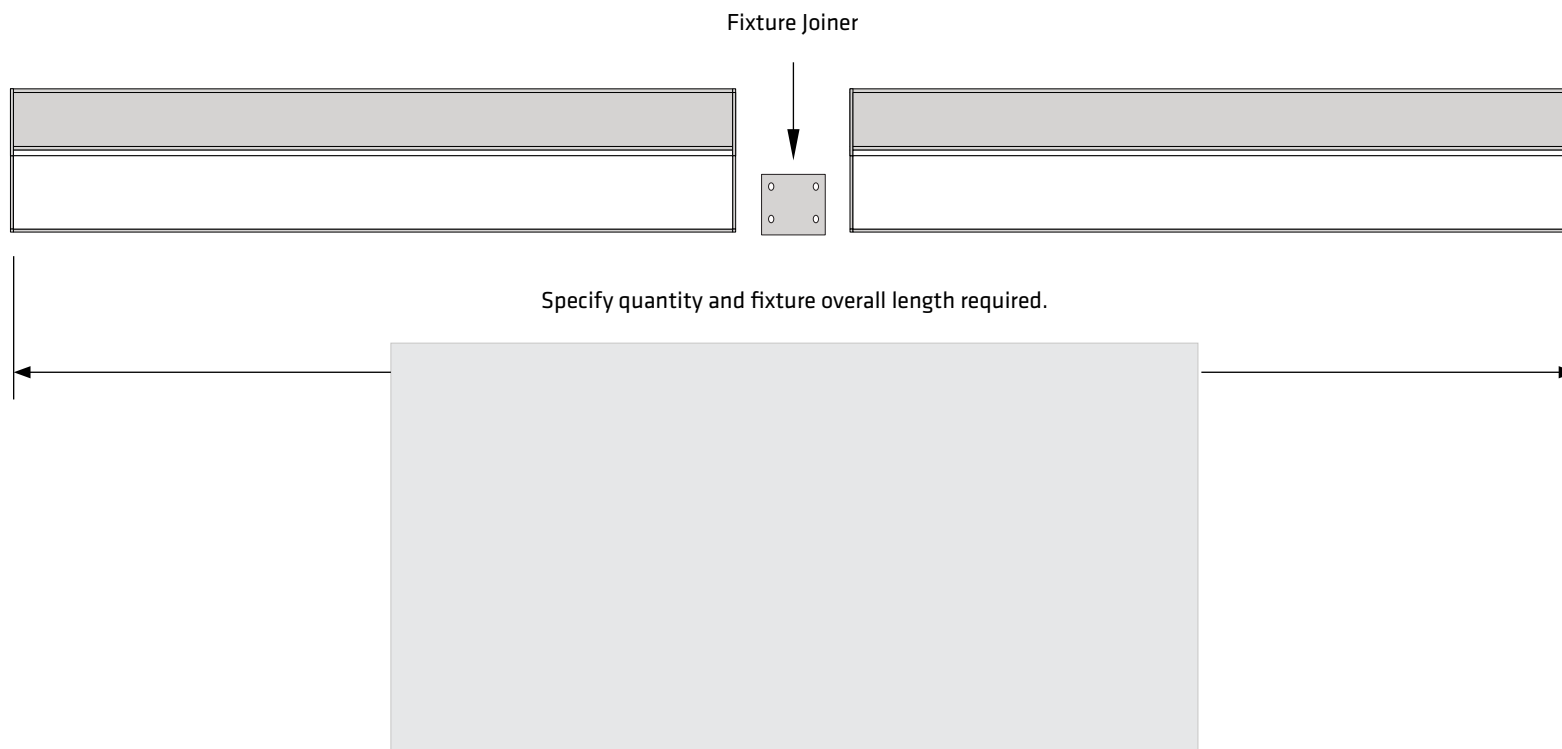


FOCUS 7 (FC7) CONFIGURATION - L SHAPE

(LS) L SHAPE

Focus 7 is available in custom configurations, including L-Shape, U-Shape, and Other Designs, with inside or outside lens orientation. A drawing with specific dimensions is required for all custom configurations.

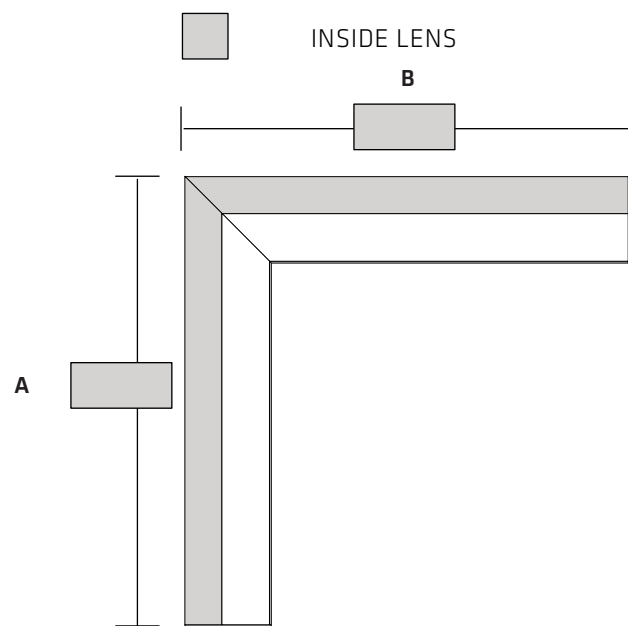

Bottom View
(Looking up at undercabinet)

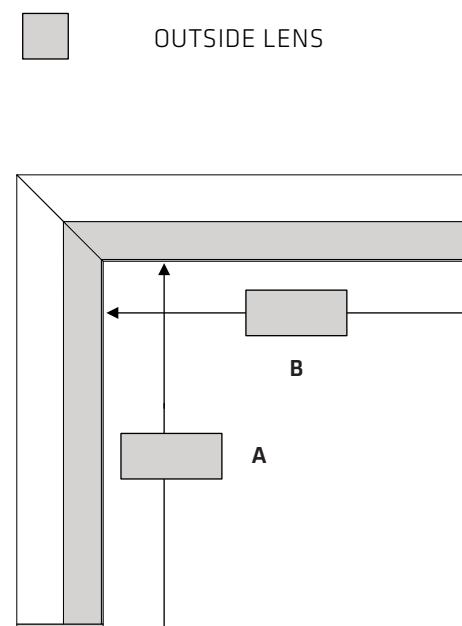

QTY	DIMENSIONS	
	A	B



QTY	DIMENSIONS	
	A	B

PAGE 5 of 11 08/26 V1


FOCUS 7 (FC7) U SHAPE CONFIGURATION

(US) U SHAPE

Focus 7 is available in custom configurations, including L-Shape, U-Shape, and Other Designs, with inside or outside lens orientation. A drawing with specific dimensions is required for all custom configurations.

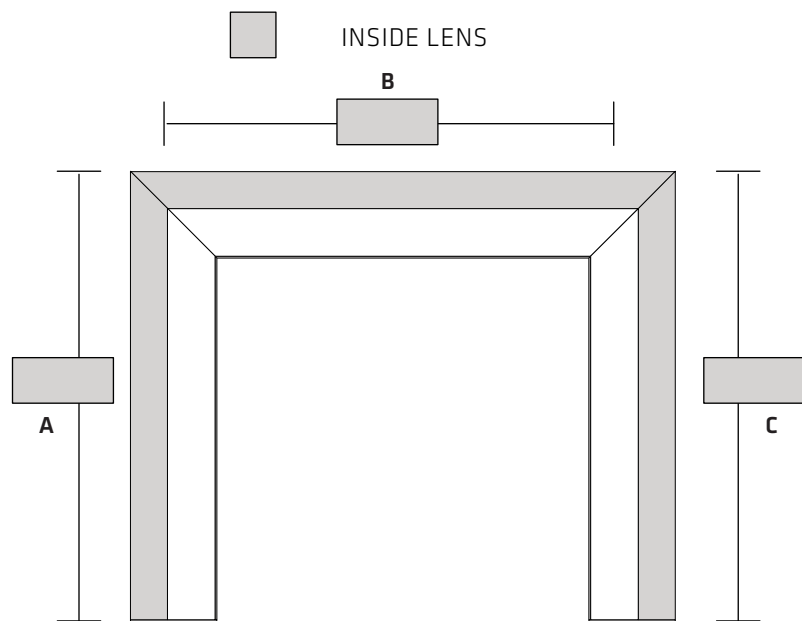

Bottom View
(Looking up at undercabinet)

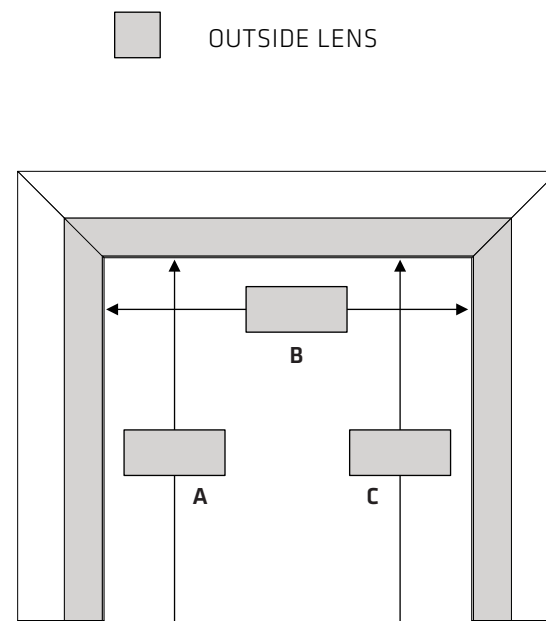

QTY	DIMENSIONS		
	A	B	C

QTY	DIMENSIONS		
	A	B	C

PAGE 6 of 11 08/26 V1




25072 Anza Dr
Valencia, CA 91355
661.495.5700
primuslighting.com

Part No:		Type:	
Job Name:		Date:	
SO/PO/Quote No:		Rev Date:	
Approved By:			

FOCUS 7 (FC7) CONFIGURATION - CUSTOM DESIGN

(CD) CUSTOM DESIGN

Focus 7 is available in custom configurations, including L-Shape, U-Shape, and Other Designs, with inside or outside lens orientation. A drawing with specific dimensions is required for all custom configurations.

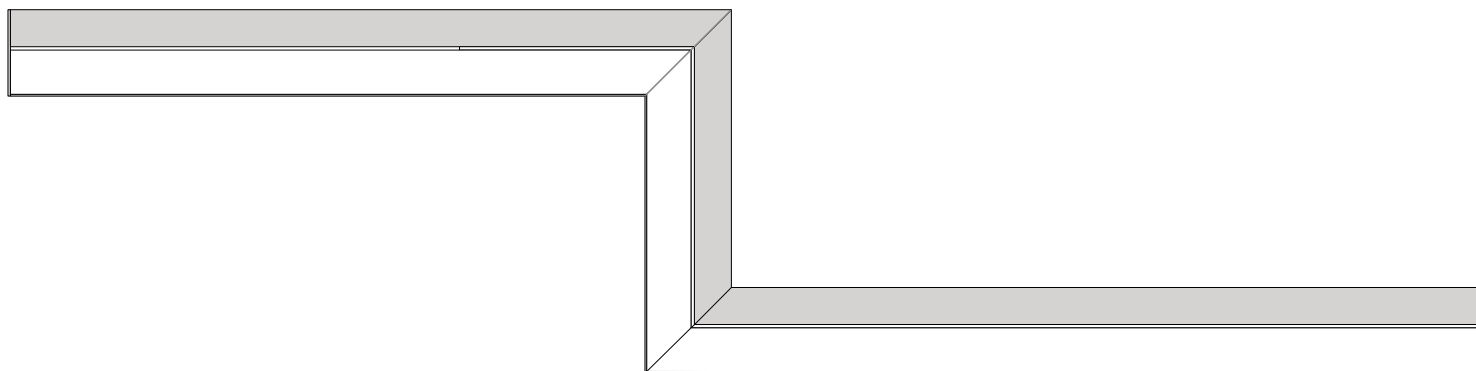

PROVIDE SPECIFIC DRAWING AND MEASUREMENTS

FOCUS 7 (FC7) MOUNTING


(SM) - STANDARD MOUNT

Inside screw mount and surface mount for all undercabinet applications.

1/4" Mounting holes provided evenly spaced on back channel.

No need to remove lens

1/2" K/Os on both ends standard. K/O field or factory pre-drilled optional.

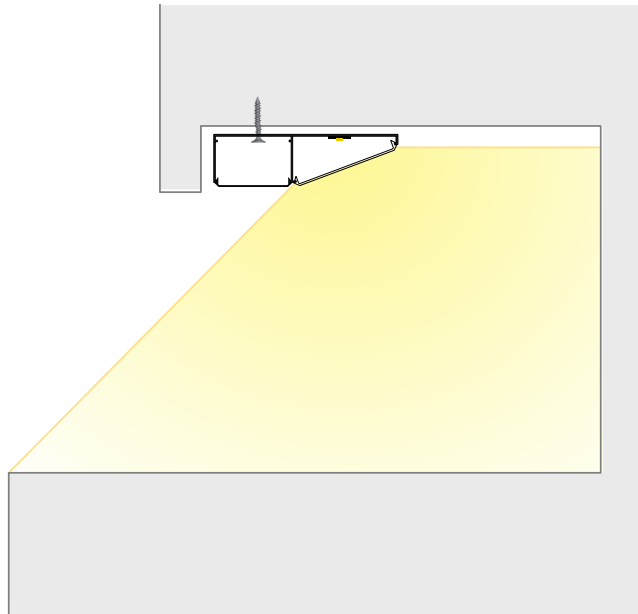

(WB) - WALL BRACKET

(WB/JBP) - WALL BRACKET + J-BOX PLATE


Wall bracket is for applications without cabinets above. Wall bracket not recommended for undercabinet.

The wall bracket is the length of the fixture minus 6" on each end.

1/2" Center service hole provided on mounting bracket and fixture.

1/4" mounting holes provided evenly spaced on wall bracket.

Optional J-Box plate can also be used with wall bracket to cover J-Box.

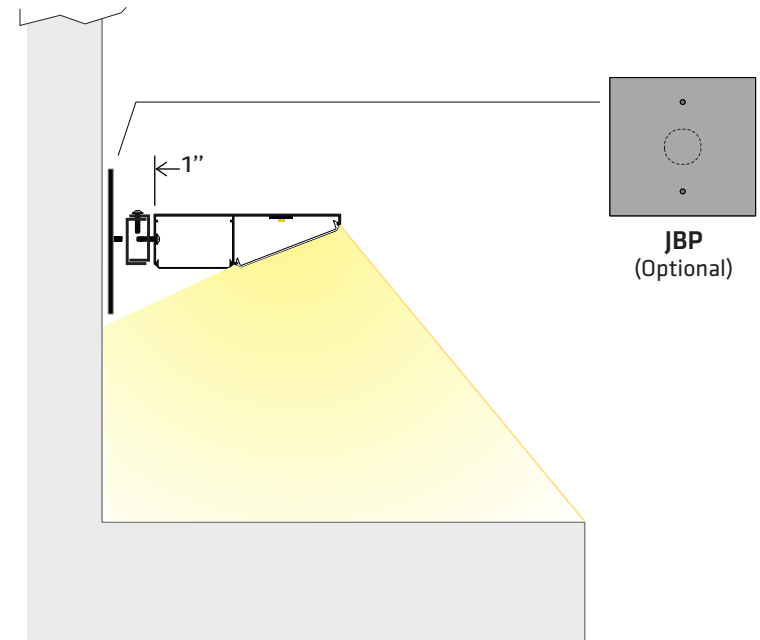

FOCUS 7 (FC7) OPTIONS

SWITCHES

Switches are installed 4" from the end of the fixture.
Large switches not available for 1' fixtures
Consult factory for other type of switch requirements not shown below.

PART NO.	DESCRIPTION
 SW120S	SMALL ROCKER SWITCH 120V, BLACK
 SW277	SMALL ROCKER SWITCH 277V, BLACK
 SWH/L	SMALL ROCKER SWITCH HIGH/LOW, BLACK



SW120



SW277



SWH/L

PART NO.	DESCRIPTION
 SWB120	PUSH BUTTON SWITCH 120V, SILVER
 SW120L	LARGE ROCKER SWITCH 120V, WHITE
 SWD120	LARGE ROCKER SWITCH/DIMMER 120V, WHITE



SWB120



SW120L



SWD120

SENSORS

Bi-level motion sensors are pre-installed and need to be programmed in the field.
Specify or consult factory for other type of sensor requirements.
Sensor not available for 1' fixtures.

PART NO.	DESCRIPTION
 MSP	BI-LEVEL MOTION SENSOR



MSP

DUPLEX RECEPTACLE

Duplex receptacles are installed 4" from the end of the fixture.
Specify or consult factory for other requirements.
Duplex receptacles not available for 1' fixtures

PART NO.	DESCRIPTION
 DRW	DUPLEX RECEPTACLE 15 A, WHITE



DUW

FOCUS 7 (FC7) POWER FEED

ENDCAP FEED (STANDARD)

Endcaps with 1/2" K/O on both ends standard

PART NO.	DESCRIPTION
EF	ENDCAP FEED (Both end-caps with K/O)



FIELD DRILLED FEED

Customer to field drill 1/2" power feed hole as required
Endcaps with 1/2" K/O on both ends standard


PART NO.	DESCRIPTION
FDF	FIELD DRILLED FEED
FPDF	FACTORY PRE-DRILLED FEED (Specify location)



POWER CORD

Factory-installed 18/3 6' white power cord with U-ground plug for standard non-dimming applications.

PART NO.	DESCRIPTION
PCL	POWER CORD LEFT SIDE
PCR	POWER CORD RIGHT SIDE



PCL



PCR

FOCUS 7 (FC7) FINISH OPTIONS

FINISH OPTIONS

Anodized, powder coat and polyester liquid paint.

Satin and white are standard finishes.

Black, custom colors and antimicrobial white are premium powder coat colors (additional cost)

The actual color of the product may vary from what is seen on electronic devices.


We cannot guarantee that the color you see on your screen accurately reflects the true color of the product.



S - SATIN

Standard

(Clear Anodized)



W - WHITE

Standard

(Powder Coat, liquid paint)



B - BLACK

Premium


(Powder Coat)



C - CUSTOM COLOR

Premium

(Powder Coat, [Provide RAL#](#))



A - ANTI MICROBIAL

Premium

(Powder Coat White)