



LINEAR CABLE SUSPENDED / SURFACE MOUNT

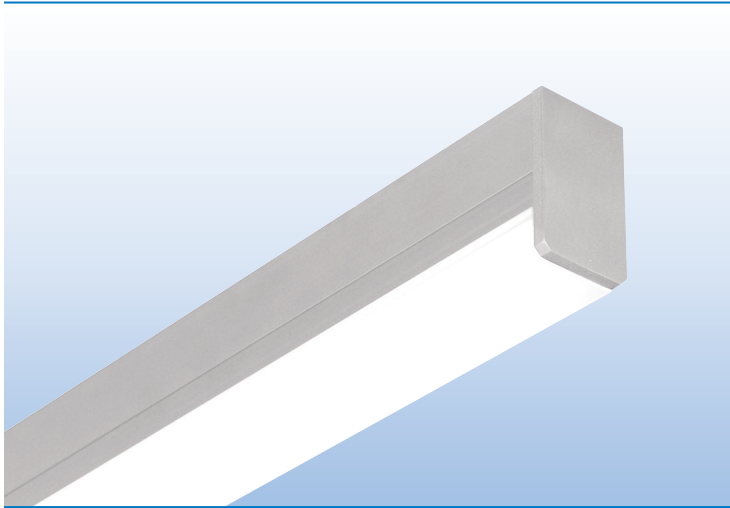



PROJECT:

TYPE:



SPECIFICATIONS

HOUSING	Extruded aluminum housing up to 12' long. Continuous runs available.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
LENS	Extruded DR acrylic, snap-on frosted widespread lens.
LED DRIVER	Integral, universal voltage; 0-10V dimming standard; 1% or 10% dimming.
MOUNTING	SURFACE MOUNT: Mounting holes pre-drilled. See page 2 for details. CABLE SUSPENDED: Aircraft cable suspension kit (SK), canopy and prewired with 18/5 SVT cord.
LED's	60,000 hours. (L70), High uniformity, 80 CRI
CERTIFICATION	ETL/CSA listed for damp locations.  2001431  MADE IN THE USA

LED COLOR & LUMEN OPTIONS

4' – 24" BOARDS		LUMENS PER FOOT – WATTS PER FOOT – LUMENS PER WATT								
LED COLOR	CRI	LOW			MEDIUM			HIGH		
WHITE 2700K	80	500 L/FT	3.5 W/FT	136 L/W	870 L/FT	6.5 W/FT	130 L/W	1160 L/FT	9.0 W/FT	127 L/W
WHITE 3000K	80	530 L/FT	3.5 W/FT	144 L/W	915 L/FT	6.5 W/FT	137 L/W	1220 L/FT	9.0 W/FT	133 L/W
WHITE 3500K	80	535 L/FT	3.5 W/FT	144 L/W	920 L/FT	6.5 W/FT	137 L/W	1225 L/FT	9.0 W/FT	133 L/W
WHITE 4000K	80	560 L/FT	3.5 W/FT	151 L/W	970 L/FT	6.5 W/FT	145 L/W	1290 L/FT	9.0 W/FT	140 L/W


Higher lumen packages available.

PART NUMBER

SERIES	LUMENS	COLOR	VOLTS	MOUNTING	ENDCAP STYLE	FINISH	LENGTH
LN1-SQL	L LOW	27K 2700K	UNV	CABLE SUSPENDED	STANDARD ENDCAP	S SATIN	2' 8'
	M MEDIUM	3K 3000K	(120/277)	SK36 36" CABLE KIT	SEB BLANK ENDS	W WHITE	3' 9'
	H HIGH	35K 3500K	10% DIM	SK48 48" CABLE KIT	SEK ONE END K/O	C CUSTOM	4' 10'
	CP CUSTOM PROGRAMMED (Specify Lumens/FT or Watts/FT)	4K 4000K	UNV 1% (120/277) 1% DIM	SK72 72" CABLE KIT	SBEK BOTH ENDS K/O		5' 11'
				SURFACE MOUNT	ARCHITECTURAL ENDCAP		6' 12'
				SM SURF. MOUNT	AEB BLANK ENDS		7'
				JBP J BOX PLATE	ILLUMINATED ENDCAP		
				WB WALL BRACKET	IEB BLANK ENDS		

MOUNTING



CABLE SUSPENDED

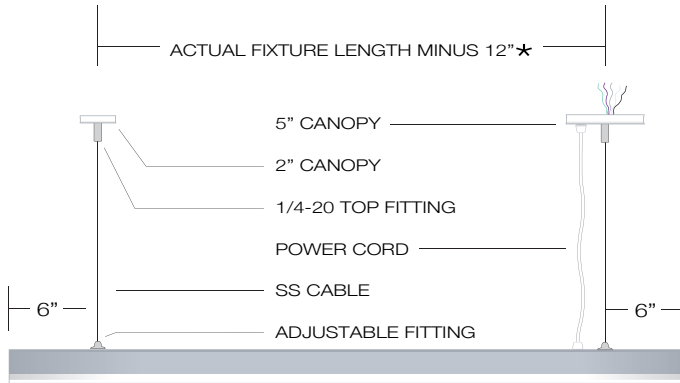


SK36 36" Suspension Kit
SK48 48" Suspension Kit
SK72 72" Suspension Kit
 Other cable lengths available.
 Suspension Kit includes:
 (2) Top Fittings for 1/4-20 Rod
 (2) Adjustable Bottom Fittings
 (2) Aircraft Cables
 (1) Prewired 18/5 White SVT Cord
 (1) 5" White Canopy with Mounting Hardware
 (1) 2" White Canopy

- *Custom pendant spacing available; consult factory
- *Lengths over 8' require center cable support
- *EM option includes 18/6 cord

SURFACE MOUNT




MOUNTING DETAILS




- 1/4" Mounting holes provided evenly spaced on back channel.
- 1/2" Back center service hole for snap-in connector provided for surface mount applications when using standard blank endcap or architectural endcap.
- 2' fixtures require off center service hole due to 12" driver

Note: Narrow housing will not cover recessed J Box. Whip feed recommended. Use optional "JBP" canopy plate for J-Box mount. (See Picture Below)



J-BOX PLATE
JBP 5" FLAT CANOPY PLATE
 TO COVER J-BOX

ENDCAP STYLES



STANDARD ENDCAP


K/O OPTIONS

SEB BLANK ENDS
SEK ONE END K/O+
SBEK BOTH END K/O+



ARCHITECTURAL ENDCAP

AEB BLANK ENDS
 3/16" PLATE ENDCAP++
 1/2" BACK SERVICE HOLE




ILLUMINATED ENDCAP

IEB BLANK ENDS

FIXTURE LENGTHS

NOMINAL LENGTH	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
ACTUAL LENGTH	23"	34"	49"	56"	73"	89"	97"	111"	121"	133"	145"

PHOTOMETRICS / CANDELA DISTRIBUTION .IES files available online or by calling the factory.

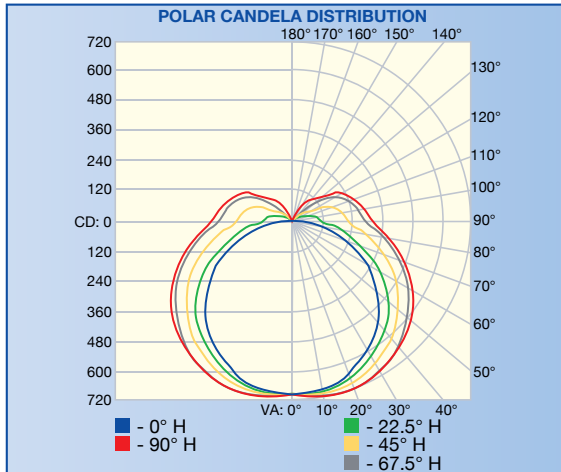


LN1 – SQL SQUARE LENS

POLAR GRAPH

REPORT NO.: 103499092LAX-001

Based on 4' linear fixture at medium lumens (35K 903L/FT x 4' = 3612L)


ISOILLUMINATION PLOT

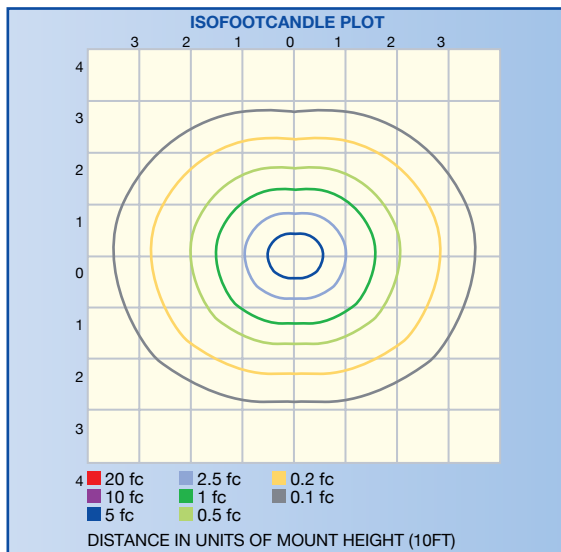

ZONAL LUMENS & PERCENTAGES AT 25°C

ZONE	LUMENS	% LUMINAIRE
0-10	66.5	1.9
10-20	196.2	5.5
20-30	309.9	8.6
30-40	396.3	11.0
40-50	445.2	12.4
50-60	451.8	12.6
60-70	414.9	11.5
70-80	345.2	9.6
80-90	260.1	7.2
90-100	207.0	5.8
100-110	179.9	5.0
110-120	140.4	3.9
120-130	91.6	2.5
130-140	51.6	1.4
140-150	28.6	0.8
150-160	9.3	0.3
160-170	1.2	0.0
170-180	0.1	0.0

ILLUMINANCE – CONE OF LIGHT

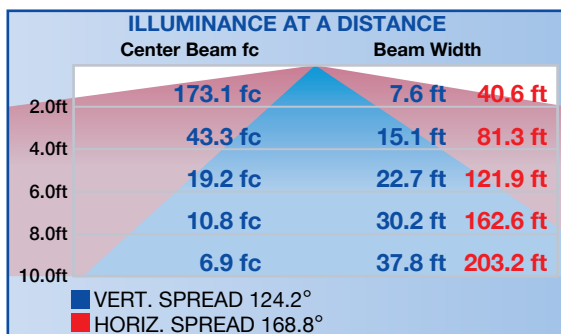

ZONAL LUMEN SUMMARY & PERCENTAGES AT 25°C

ZONE	LUMENS	% LUMINAIRE
0-30	572.6	15.9
0-40	968.6	26.9
0-60	1866	51.9
60-90	1020	28.4
0-90	2886	80.3
90-180	709.8	19.7
0-180	3596	100.0