

LINEA SERIES



LINEA SERIES FEATURES

The Linear Family is designed to deliver precise illumination across every scale of space. From low-ceiling environments where controlled, comfortable brightness is essential, to mid-height interiors requiring balanced general lighting, and up to high-ceiling applications that demand powerful, uniform performance – each model is optimized to achieve perfect light distribution at its intended mounting height.

PERFORMANCE

90CRI, 27K, 3K, 35K, 4K, RGBW, Tunable white & Dim-warm Low, medium & high lumens up 1100/ft & custom up to 1800/ft. Various options of LED drivers, programmable and 0-10V dimming standard symmetric and asymmetric options

CUSTOMIZATION


Versatile lens options, made-to-measure lengths, and creative configurations with angled connections, patterns, and zig-zag forms.

COMPLIANCE CERTIFICATIONS




LINEA 1

Sleek. Compact. Refined.

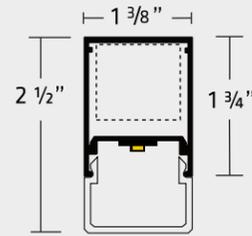


LN1-SL

LINEA 1 SQUARE LENS

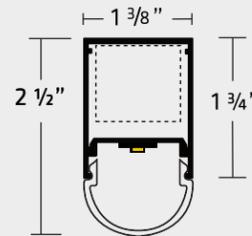

LN1-RL

LINEA 1 ROUND LENS

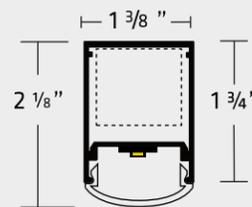

LN1-FRL

LINEA 1 FLAT ROUNDED LENS



ONLINE PRODUCT

LIGHT DISTRIBUTION



Symmetrical



Asymmetrical

TECH AND PERFORMANCE

Kelvin: 2700K to 4000K.



DRIVER	DESCRIPTION
UNV0%	0 - 10V 0% Dimming
UNV1%	0 - 10V 1% Dimming
UNV10%	0 - 10V 10% Dimming
UNV(CD)%	0 - 10V Custom Dimming
TRIAC	2 Wire Dimming Driver
DALI	DALI Dimming Driver
LTRN	Lutron Dimming Driver

Lumens: 433 L/FT to 1,100 L/FT (1,800+ Available)


FINISH OPTIONS

-  S - Satin
-  W - White
-  B - Black
-  C - Custom Colors
-  A - Antimicrobial




LINEA 2


Balanced. Adaptable. Versatile.

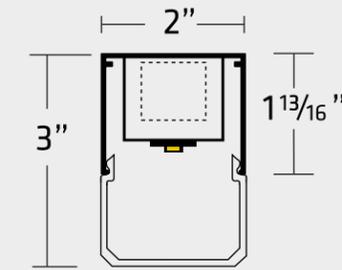

LN2-SL
LINEA 2 SQUARE LENS

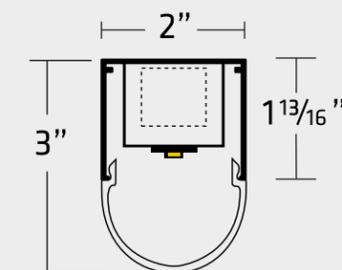

LN2-RL
LINEA 2 ROUND LENS

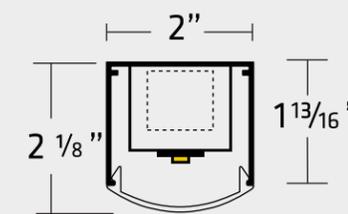

LN2-FRL
LINEA 2 FLAT ROUNDED LENS

FINISH OPTIONS

- S - Satin
- W - White
- B - Black
- C - Custom Colors
- A - Antimicrobial

TECH AND PERFORMANCE

DRIVER	DESCRIPTION	OPTIONS
UNV0%	0 - 10V 0% Dimming	EM PACKS
UNV1%	0 - 10V 1% Dimming	EM1
UNV10%	0 - 10V 10% Dimming	800 L
UNV(CD)%	0 - 10V Custom Dimming	EM2
		1400 L
TRIAC	2 Wire Dimming Driver	SENSORS
DALI	DALI Dimming Driver	MSP
LTRN	Lutron Dimming Driver	Bi-Level Sensor

Lumens: 433 L/FT to 1,100 L/FT (1,800+ Available)

Kelvin: 2700K to 4000K.



LIGHT DISTRIBUTION




Symmetrical



Asymmetrical



LINEA 3

Bold. Bright. Built to Scale.

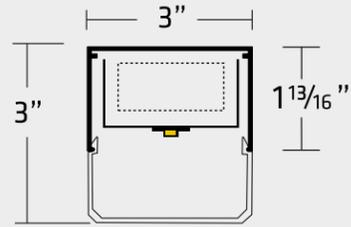


LN3-SL

LINEA 3 SQUARE LENS

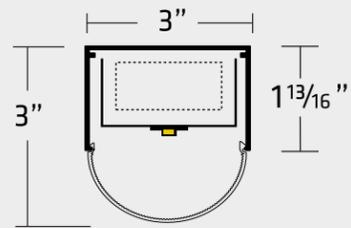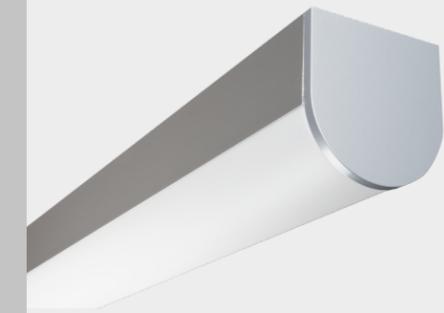


LN3-RL

LINEA 3 ROUND LENS

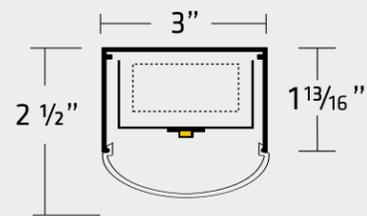

LN3-FRL

LINEA 3 FLAT ROUNDED LENS

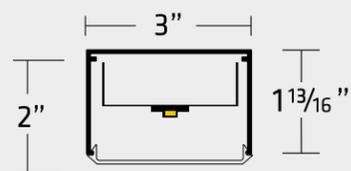

LN3-FL

LINEA 3 FLAT LENS



ONLINE PRODUCT

LIGHT DISTRIBUTION



Symmetrical



Asymmetrical

TECH AND PERFORMANCE

Kelvin: 2700K to 4000K.



TUNABLE WHITE



RGBW

DRIVER	DESCRIPTION	OPTIONS
UNV0%	0 - 10V 0% Dimming	EM PACKS EM1 800 L EM2 1400 L
UNV1%	0 - 10V 1% Dimming	
UNV10%	0 - 10V 10% Dimming	
UNV(CD)%	0 - 10V Custom Dimming	
TRIAC	2 Wire Dimming Driver	SENSORS MSP Bi-Level Sensor
DALI	DALI Dimming Driver	
LTRN	Lutron Dimming Driver	

Lumens: 433 L/FT to 1,100 L/FT (1,800+ Available)

FINISH OPTIONS



S - Satin



W - White



B - Black






C - Custom Colors



A - Antimicrobial

You Imagine. We Engineer.

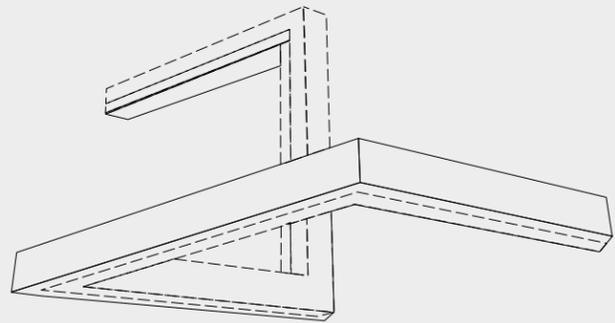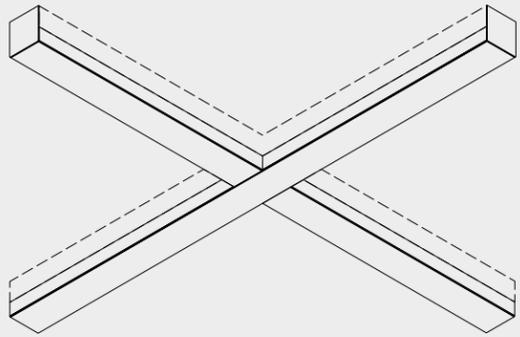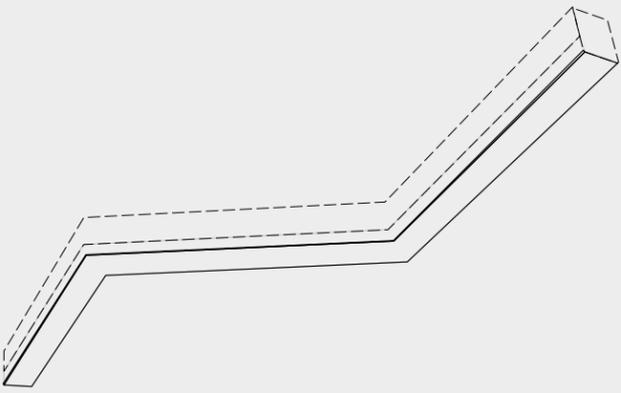

SEE PROJECT



ONLINE PRODUCTS

www.primuslighting.com

© LINEA•V3 / 2025 PRIMUS LIGHTING ALL RIGHTS RESERVED

