

Q U A D R O



SPECIFICATIONS

DESCRIPTION

Architectural LED squares available with down light, up light, inside light or outside light options.

HOUSING

Extruded aluminum housing, 1 3/8" wide.

FINISH

Satin anodized or white paint finish standard. Custom finish optional.

LENS

Three styles, extruded acrylic, snap-on frosted widespread lens, smooth uniformity and no pixelization.

LED DRIVER

Integral or remote (*Included*), universal voltage; 0-10V dimming standard; custom programmable.

MOUNTING

Cable suspended and surface mount:

LED's


(LED boards) 50,000 hours. (L70), 85 CRI, by Nichia and Cree; 2700K, 3000K, 3500K and 4000K; Programmable output to greater than 1000L/FT

CERTIFICATION


ETL/CSA listed for damp locations.




LENS OPTIONS

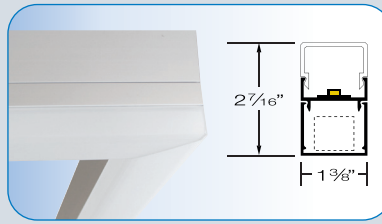

SQL – SQUARE LENS

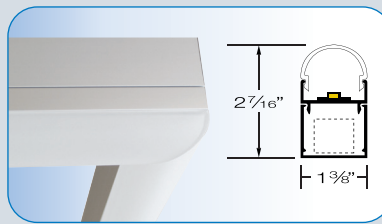

RLR – ROUND LENS

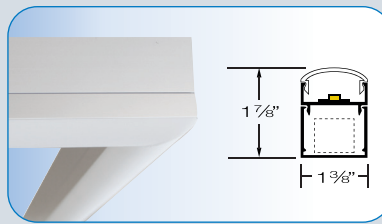

FRL – FLAT ROUND LENS




QUADRO 1 LED SERIES


WWW.PRIMUSLIGHTING.COM

MOUNTING OPTIONS


SC – STRAIGHT CABLES STYLE

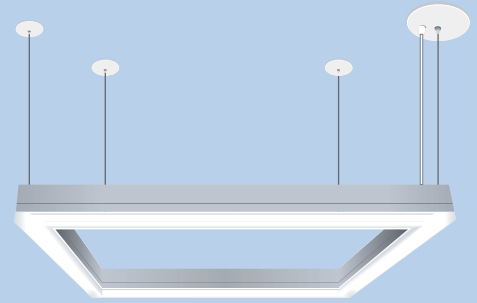

PC – PYRAMID CABLES STYLE

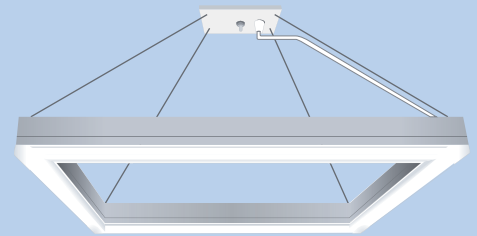

CC – CENTER CABLE STYLE

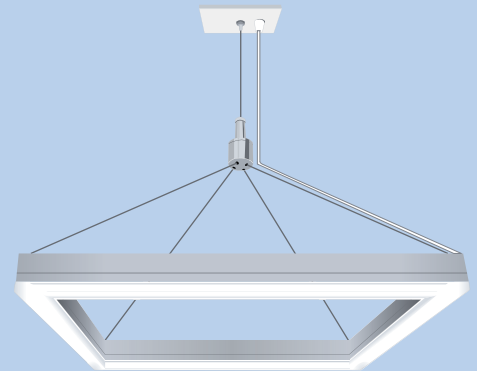

SM – SURFACE MOUNT

