



COVE 2 (CV2) SERIES

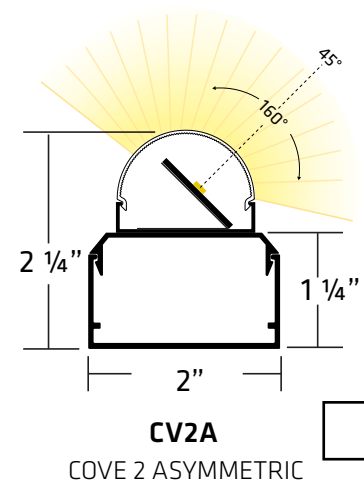

MODEL	LED COLOR	LUMENS	DRIVER	CONFIGURATION	MOUNTING	FINISH	LENGTH
CV2 COVE 2	27K 2700k	L LOW	UNV0% 0-10V 0%	FLX FIELD CURVABLE	SM STANDARD MOUNT	S SATIN (Standard)	SPECIFY
CV2A COVE 2 ASYMMETRIC	3K 3000k	M MEDIUM	UNV1% 0-10V 1%	ST STRAIGHT	TB TAB MOUNT (Optional)	W WHITE (Standard)	Overall
	35K 3500k	H HIGH	UNV10% 0-10V 10%	RP RECTANGULAR PATTERN		B BLACK (Premium)	Length
	4K 4000k	CL CUSTOM LUMENS	UNVCD% 0-10V CD	SP SQUARE PATTERN		C CUSTOM (Premium)	Required
	R RED	CW CUSTOM WATTS	TRIAC 2 WIRE	CP CUSTOM PATTERN		A ANTIMICROBIAL (Premium)	
	G GREEN						
	B BLUE						

PAGE 1 of 8 08/26 V3

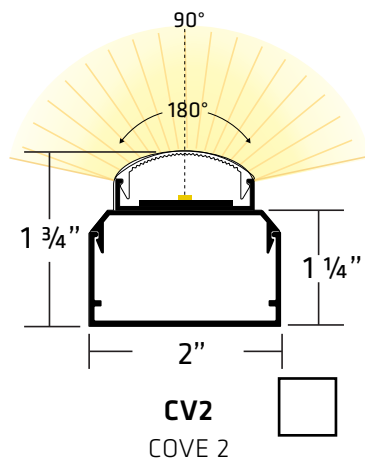

25072 Anza Dr
Valencia, CA 91355
661.495.5700
primuslighting.com

Part No:		Type:	
Job Name:		Date:	
SO/PO/Quote No:		Rev Date:	
Approved By:			

COVE 2 (CV2) LED COLORS - LUMENS - LED DRIVERS

LED COLORS AND LUMENS

	COLOR		DESCRIPTION									
			CRI	 (L) LOW LUMENS			 (M) MEDIUM LUMENS			 (H) HIGH LUMENS		
	27K	2700K	CRI90	433 L/FT	3.5 W/FT	120 L/W	760 L/FT	6.5 W/FT	117 L/W	1026 L/FT	9.0 W/FT	114 L/W
	3K	3000K	CRI90	448 L/FT	3.5 W/FT	124 L/W	787 L/FT	6.5 W/FT	121 L/W	1062 L/FT	9.0 W/FT	118 L/W
	35K	3500K	CRI90	463 L/FT	3.5 W/FT	129 L/W	814 L/FT	6.5 W/FT	125 L/W	1098 L/FT	9.0 W/FT	122 L/W
	4K	4000K	CRI90	478 L/FT	3.5 W/FT	133 L/W	840 L/FT	6.5 W/FT	129 L/W	1134 L/FT	9.0 W/FT	126 L/W
	R	RED	CRI90	292 L/FT	3.5 W/FT	82 L/W	507 L/FT	6.5 W/FT	77 L/W	669 L/FT	9.0 W/FT	74 L/W
	G	GREEN	CRI90	499 L/FT	3.5 W/FT	143 L/W	775 L/FT	6.5 W/FT	119 L/W	969 L/FT	9.0 W/FT	107 L/W
	B	BLUE	CRI90	118 L/FT	3.5 W/FT	34 L/W	214 L/FT	6.5 W/FT	33 L/W	282 L/FT	9.0 W/FT	31 L/W

(CL) Custom Lumens / ft, or (CW) custom watts / ft available. Higher Kelvin also available, consult factory.
Specify or consult factory for any other type of LED requirements not shown above such as led type, LED color, lumens, etc.

LED DRIVERS (Integral)

DRIVER	DESCRIPTION			
☐	UNV0%	0 - 10V Dimming Driver	0 % Dimming (Dim to Off)	120/277V (347V Available)
☐	UNV1%	0 - 10V Dimming Driver	1% Dimming	120/277V (347V Available)
☐	UNV10%	0 - 10V Dimming Driver	10% Dimming	120/277V (347V Available)
☐	UNV(CD)%	0 - 10V Dimming Driver	Custom Dimming (Specify %)	120/277V (347V Available)
☐	TRIAC	2 Wire Dimming Driver	2 Wire Phase Triac Dimming	120/277V

Specify or consult factory for any other type of LED DRIVER requirements not shown above.

COVE 2 (CV2) CONFIGURATION - (FLX) FLEXIBLE, FIELD CURVABLE

(FLX) - FLEXIBLE, FIELD CURVABLE


FLX configuration is flexible, field curvable, field adjustable & field connectable.

Cove or fixture overall length measurements are required.

Fixtures are shipped pre-wired and pre-assembled

The number of fixtures and sections per fixture can vary depending on the lumens, watts, and overall length requirements.

This system is quoted by the foot and not by fixtures or sections.

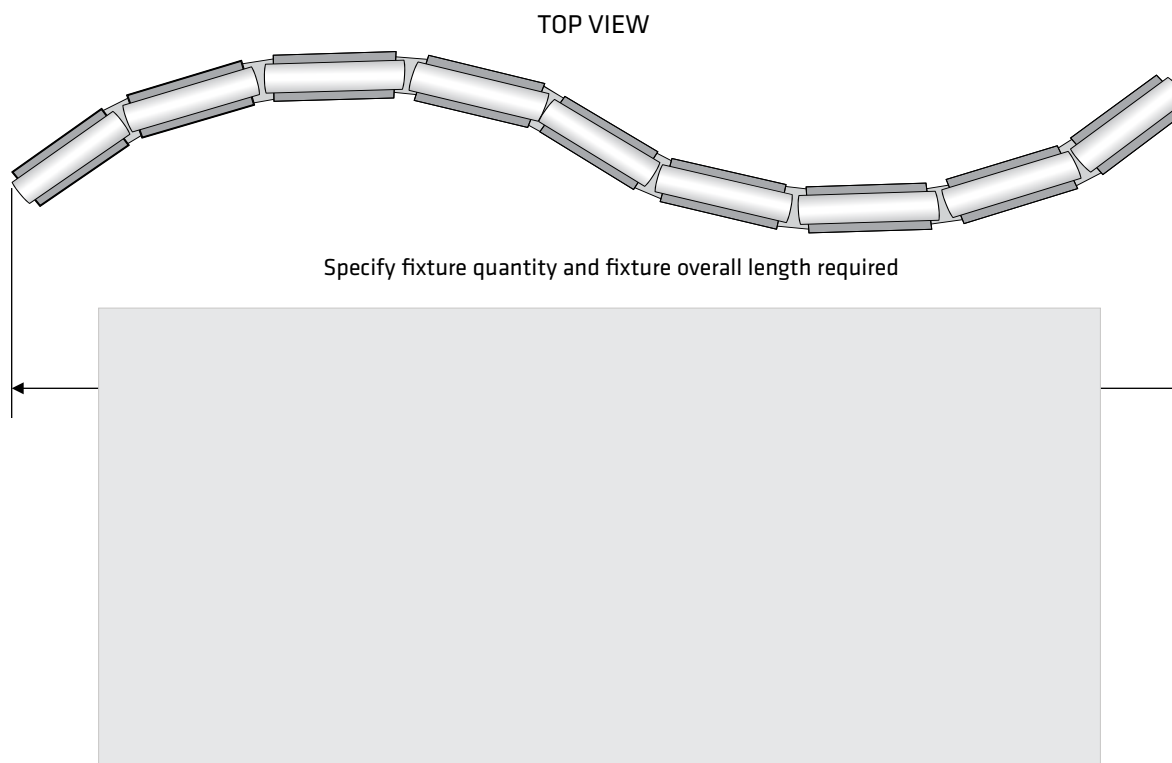

COVE 2 (CV2) CONFIGURATION - (FLX) FLEXIBLE, FIELD CURVABLE COMPLETE CIRCLES

(FLX) - FLEXIBLE, FIELD CURVABLE


FLX configuration is flexible, field curvable, field adjustable & field connectable.

Cove or fixture overall length measurements are required.

Fixtures are shipped pre-wired and pre-assembled

The number of fixtures and sections per fixture can vary depending on the lumens, watts, and overall length requirements.

This system is quoted by the foot and not by fixtures or sections.

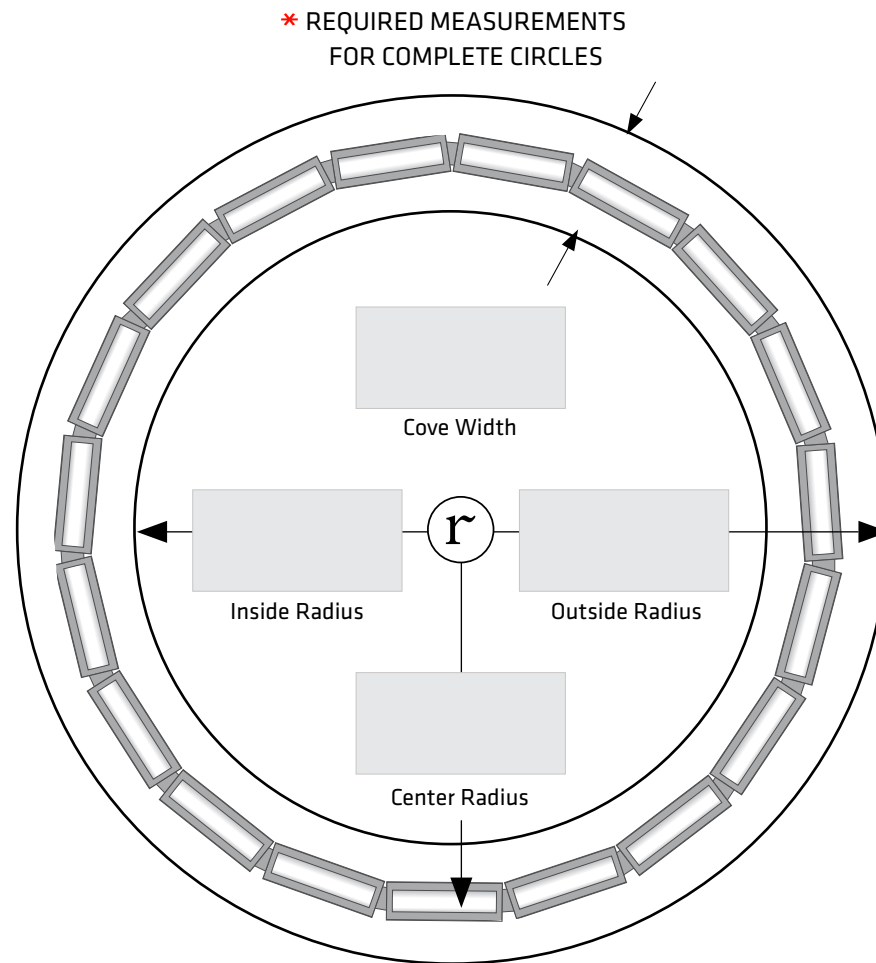

PAGE 4 of 8 08/26 V3



25072 Anza Dr
Valencia, CA 91355
661.495.5700
primuslighting.com

Part No:		Type:	
Job Name:		Date:	
		Rev Date:	
SO/PO/Quote No:		Approved By:	

COVE 2 (CV2) CONFIGURATION - (ST) STRAIGHT

(ST) - STRAIGHT

ST configurations is for straight fixtures


Straight fixtures can be made up to 12' long in one single and continuous housing.

Longer fixtures & runs can be made in the field by connecting multiple fixtures with our joiners.

The number of fixtures per run can vary depending on the lumens, watts, and overall run length of fixture and or cove requirements.

Straight fixtures are also quoted by the foot.

TOP VIEW

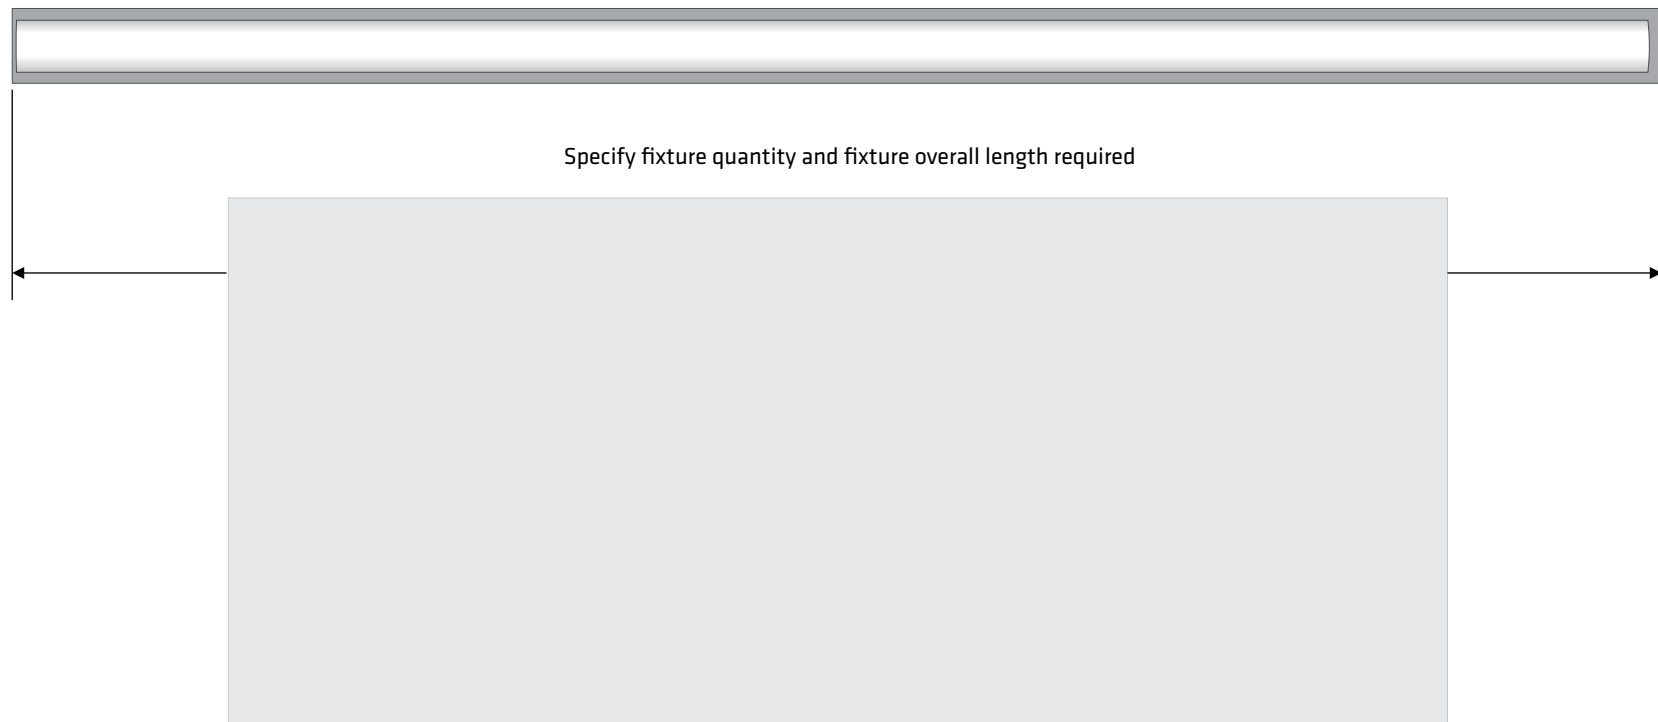


COVE 2 (CV2) CONFIGURATION - (RP) RECTANGULAR PATTERNS

(RP) - RECTANGULAR PATTERN

Rectangular patterns are made with multiple straight fixtures.

A drawing with specific dimensions and details is required.


Select miter cut or whipped corners

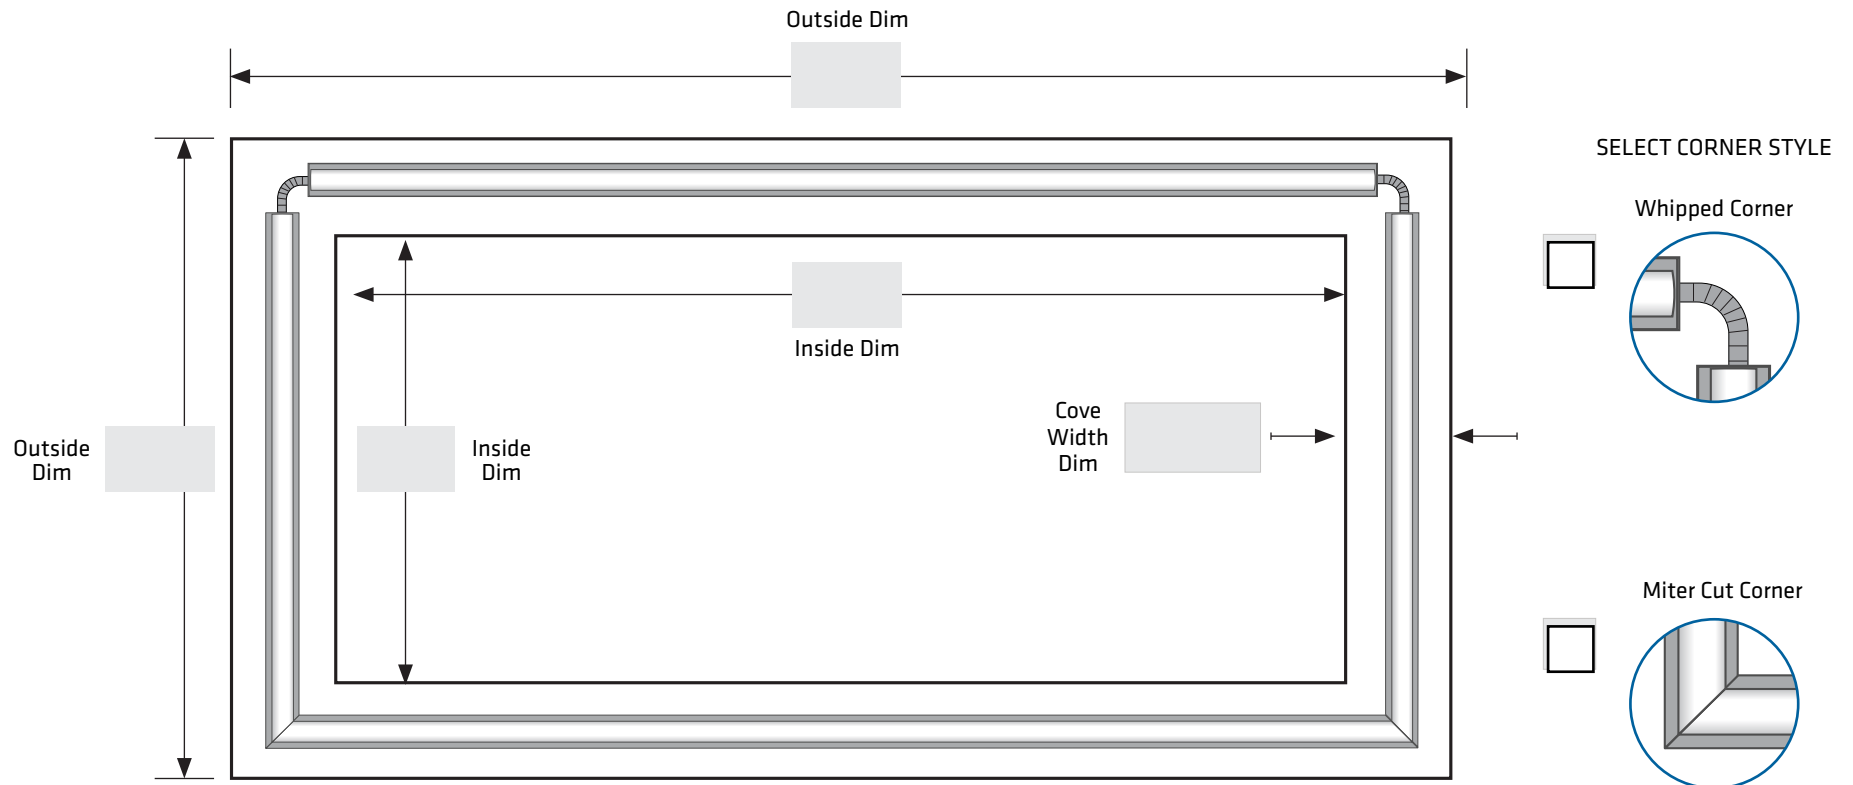

COVE 2 (CV2) CONFIGURATION - (SP) SQUARE PATTERNS


(SP) - SQUARE PATTERN

Square patterns are made with multiple straight fixtures.
A drawing with specific dimensions and details is required.
Select miter cut or whipped corners

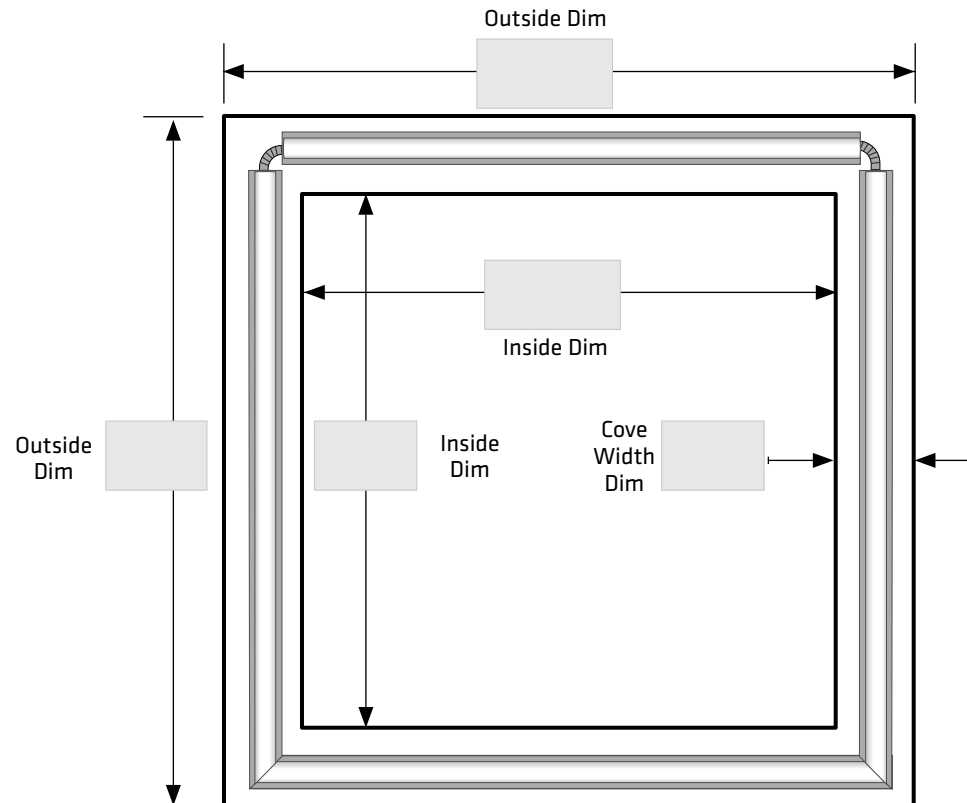


SELECT CORNER STYLE

Whipped Corner




Miter Cut Corner




COVE 2 (CV2) MOUNTING - FINISH

MOUNTING OPTIONS

These mounting options apply to both (FLX) field curvable and (ST) straight configurations.

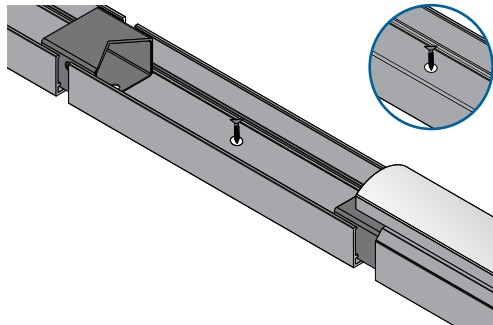

SM - STANDARD MOUNT
(Inside screw mount)

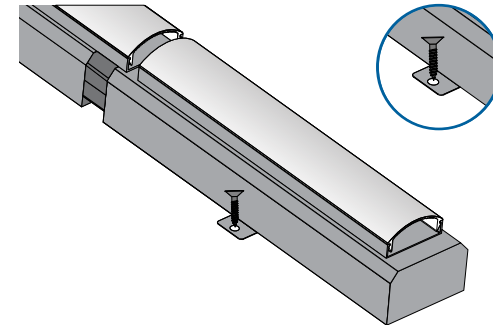

TM - TAB MOUNT
(Optional)



FINISH OPTIONS

Clear anodize, powder coat and polyester liquid paint.

Satin and white are standard finishes.

Black, custom colors and antimicrobial white are premium colors (additional cost)

White or satin finishes are recommended for cove or indirect lighting applications.

The actual color of the product may vary from what is seen on electronic devices.

We cannot guarantee that the color you see on your screen accurately reflects the true color of the product.



☐ **S - SATIN**
Standard
(Clear Anodized)




☐ **W - WHITE**
Standard
(Powder Coat, liquid paint)



☐ **B - BLACK**
Premium
(Powder Coat)



☐ **C - CUSTOM COLOR**
Premium
(Powder Coat, [Provide RAL#](#))



☐ **A - ANTI MICROBIAL**
Premium
(Powder Coat White)